

A

12/17/98  
Jc511 U.S. PTO

PATENT  
DON02 P-728  
Express Mail No. EL166968089US

Jc526 U.S. PTO  
09/21/98  
12/17/98

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Jeffrey A. Lewno  
For : BONDED VEHICULAR GLASS ASSEMBLIES UTILIZING  
TWO-COMPONENT URETHANES, AND RELATED METHODS  
OF BONDING

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

REQUEST FOR FILING CONTINUATION APPLICATION  
UNDER 37 CFR 1.53(b)

This is a request for filing a continuation application under 37 CFR 1.53 of co-  
pending application Serial No. 08/924,405, filed on August 22, 1997, by Jeffrey A. Lewno,  
entitled BONDED VEHICULAR GLASS ASSEMBLIES UTILIZING TWO-COMPONENT  
URETHANES, AND RELATED METHODS OF BONDING, which will issue as U.S.  
Patent No. 5,853,895 on December 29, 1998, which is a file wrapper continuation of Serial  
No. 08/420,233, filed April 11, 1995, now abandoned, the disclosures of which are hereby  
incorporated by reference herein.

1. Copy of Prior Application as Filed Which is Attached

I hereby verify that the attached papers are a copy of what is shown in my  
records to be the above identified prior application, including the Declaration as originally  
filed (37 CFR 1.53). No amendments referred to in any Declaration filed to complete the  
prior application introduced new matter in that application.

09213706 121798

Applicants : Jeffrey A. Lewno  
Page : 2

The copy of the papers of the prior application as filed which is attached includes 44 pages of specification, 24 pages of claims (130 claims), 1 page of Abstract, 8 sheets of informal drawings, and Declaration and Power of Attorney.

2. Amendments

A Preliminary Amendment is enclosed. By such amendment, claims 1-130 are cancelled and new claims 131-169 are added prior to calculation of the filing fee.

3. Filing Fee and Calculation

Basic Fee	\$ 760.00
Additional Fees	
Each independent claim in excess of three, times \$78.00	\$ .00
Number of claims in excess of twenty, times \$18.00	\$ 342.00
Filing multiple dependent claims per application \$260.00	\$ .00
Total Filing Fee	\$1102.00

A check in the amount of \$1102.00 for the filing fee is enclosed herewith.

The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 22-0190.

The Commissioner is hereby authorized to charge the following fees during the pendency of this application, or credit any overpayment, to Deposit Account No. 22-0190.

A duplicate copy of this sheet is enclosed.

- a) Any filing fees under 37 CFR 1.16 for presentation of extra claims for which full payment has not been tendered.
- b) Any patent application processing fees under 37 CFR 1.17 for which full payment has not been tendered.

09213706-131593

4. Drawings

Eight (8) sheets of informal drawings are enclosed and are copies of those filed in the parent application.

5. Disclosure Statement

Applicants respectfully request that the information cited in the prior parent applications, Serial Nos. 08/924,405 and 08/420,233 be considered in the present application.

A disclosure statement is enclosed along with copies of forms PTO-1449 listing all of the information from the prior parent applications. Copies of all of the references as listed are available in the files of the prior applications.

6. Inventorship Statement

With respect to the prior co-pending U.S. application from which this application claims benefit under 35 USC 120, the inventor in this application the same, namely, Jeffrey A. Lewno.

7. Assignment

The prior applications are assigned to Donnelly Corporation, a Michigan corporation, located and doing business at 414 East Fortieth Street, Holland, Michigan 49423.

That Assignment for the original application was recorded in the United States Patent and Trademark Office on April 11, 1995, at Reel 7610, Frame 0509.

8. Power of Attorney

A new Power of Attorney was filed on February 3, 1997, in the grandparent application, Serial No. 08/420,233 and is to Van Dyke, Gardner, Linn & Burkhardt, LLP and the individual attorneys and agents at said address, consisting of Daniel Van Dyke, Reg. No. 25 046; Donald S. Gardner, Reg. No. 25 975; Terence J. Linn, Reg. No. 30 283; and

09213706-121798

Applicants : Jeffrey A. Lewno  
Page : 4

Frederick S. Burkhardt, Reg. No. 29 288. This new Power of Attorney revokes all previous Powers of Attorney.

Please address all future correspondence to:

Donald S. Gardner  
Van Dyke, Gardner, Linn & Burkhardt, LLP  
2851 Charlevoix Drive, S.E.  
P.O. Box 888695  
Grand Rapids, MI 49588-8695  
Ph: (616) 975-5500  
Fax: (616) 975-5505

9. Verification


I hereby declare further that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Respectfully submitted,

JEFFREY A. LEWNO

By: Van Dyke, Gardner, Linn & Burkhardt, LLP

12/17/98  
\_\_\_\_\_  
Date

  
\_\_\_\_\_  
Donald S. Gardner  
Registration No. 25 975  
2851 Charlevoix Drive, S.E.  
P.O. Box 888695  
Grand Rapids, MI 49588-8695  
(616) 975-5500

DSG/ram

0923705 "12198

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Jeffrey A. Lewno

For : BONDED VEHICULAR GLASS ASSEMBLIES UTILIZING TWO-  
COMPONENT URETHANES, AND RELATED METHODS OF  
BONDING

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

PRELIMINARY AMENDMENT

Prior to the examination of this continuation application, Applicant requests  
amendment of the application as follows:

IN THE SPECIFICATION:

Page 1, between lines 2 and 3:

Please insert the following:

--CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation of U.S. Patent Application Serial No.  
08/924,405, filed August 22, 1997, by Jeffrey A. Lewno, now U.S. Patent No.  
\_\_\_\_\_, which is a continuation of Serial No. 08/420,233, filed April  
11, 1995, by Jeffrey A. Lewno, now abandoned, the disclosures of which are hereby  
incorporated by reference herein.--

Page 19, line 4:

After "Patent" please insert --5,443,673, issued August 22, 1995--.

IN THE CLAIMS:

Please cancel claims 1-130, as originally filed, without prejudice.

09/24/98 13:33

Please add the following new claims 131-169 as follows:

-131-

A method of forming a bonded vehicular assembly by adhering a load-bearing attachment member to a glass surface, said method comprising:

providing a substrate having a first glass surface and an opposing second surface;

providing an attachment member to be adhered to said first glass surface, said attachment member having a mounting surface;

forming a rapid set, rapid cure, two component urethane adhesive by mixing an isocyanate component and a polyol component;

depositing a layer of said adhesive on at least one of said attachment member mounting surface and said first glass surface;

positioning said attachment member and said substrate after said mixing of said components and said depositing of said layer on said mounting surface or said first glass surface such that said adhesive layer is disposed between and contacting said attachment member mounting surface and at least a portion of said first glass surface of said substrate without exposure of said attachment member on said opposing second surface of said substrate;

said adhesive setting up during a set up period while said adhesive layer holds said attachment member against movement resulting from the weight of said substrate and said attachment member and/or from application of a relatively slight force; and

allowing said adhesive layer to cure, said cured adhesive layer bonding said attachment member to said first glass surface prior to installation of said assembly in the vehicle.

09243706.131393

-132-

The method of claim 131 wherein said polyol component includes a high amine density plural amine compound in an amount of from about 2% to about 20% by weight of said polyol component; said method including mixing at least one filler agent in at least one of said isocyanate component and said polyol component, wherein said filler agent is in an amount of from about 15% to about 50% of the total weight of said polyol and isocyanate components.

-133-

The method of claim 132 including mixing said filler agent in an amount of from about 20% to about 30% of the total weight of said polyol and said isocyanate components.

-134-

The method of claim 132 including selecting said filler agent from the group consisting of silicates, silica, calcium carbonate, talc, and combinations thereof.

-135-

The method of claim 131 including providing said isocyanate component as compounds with isocyanate functionality and said polyol component as compounds with hydroxy and/or amino functionality, and wherein the ratio of isocyanate functionality to hydroxy and amino functionality is from about 0.9 to about 2.0.

-136-

The method of claim 135 including providing said ratio of isocyanate functionality to hydroxy and amine functionality from about 1.03 to about 1.4.

-137-

The method of claim 136 including providing said ratio of isocyanate functionality to hydroxy and amino functionality from about 1.1 to about 1.3.

-138-

The method of claim 132 including providing said high amine density plural amine compound as a compound having an amine to carbon ratio of from about 1.0 to about 0.25:1 with the provisos that (i) the compound contains at least 3 amine groups except if said compound is aromatic then said compound at least 2 amine groups, and (ii) the compound contains from 2 to 24 carbon atoms.

-139-

The method of claim 138 including providing said high amine density plural amine compound with a molecular weight of from about 115 to about 5000.

-140-

The method of claim 139 including providing said high amine density plural amine compound with a molecular weight of from about 210 to about 290.

-141-

The method of claim 132 including providing said high amine plural amine as a reaction product of (i) at least one of pentaerythritol, glucose, and sucrose, and (ii) at least one member selected from the group consisting of ammonia and amino alkanes of the formula,  $C_xH_nHN_2$ , where x ranges from 1 to 20 and n is such that the alkane is saturated.

-142-

The method of claim 141 including providing x in a range of ranges from about 1 to about 6.

-143-

The method of claim 131 further comprising, prior to depositing said adhesive, a step of:

depositing a layer of at least one of an adhesion promoter and a primer on at least one of said glass surface and said attachment member mounting surface.



-144-

The method of claim 131 wherein the thickness of said adhesive disposed between said attachment member and at least a portion of said glass surface is from about 0.01 mm to about 4.0 mm.

-145-

The method of claim 144 wherein the thickness of said adhesive is from about 0.25 mm to about 2.0 mm.

-146-

The method of claim 145 wherein the thickness of said adhesive is from about 0.5 mm to about 1.0 mm.

-147-

The method of claim 131 including performing said depositing step by robotic deposition.

-148-

The method of claim 131 including performing said depositing step by utilizing a dispense metering unit and a mixing unit.

-149-

The method of claim 148 including mixing said components with a static mix tube in association with a sequential reverse static mixer.

-150-

The method of claim 148 including delivering said adhesive through thermally controlled lines to said dispense metering unit.

-151-

The method of claim 131 including accelerating said curing by heating said adhesive.

The method of claim 151 including selecting said heating from the group consisting of induction curing, infra red heating, and combinations thereof.

A method of forming a bonded vehicular assembly by adhering a load-bearing attachment member to a glass surface, said method comprising:

providing a substrate having a first glass surface and an opposing second surface;

providing an attachment member to be adhered to said first glass surface, said attachment member having a mounting surface;

forming a rapid set, rapid cure, two component urethane adhesive with an isocyanate component and a polyol component by metering a controlled volume of each component and mixing said metered volumes of said components;

robotically depositing a layer of said adhesive on at least one of said attachment member mounting surface and said first glass surface;

positioning said attachment member and said substrate after said mixing of said components and said depositing of said layer on said mounting surface or said first glass surface such that said adhesive layer is disposed between and contacting said attachment member mounting surface and at least a portion of said first glass surface of said substrate without exposure of said attachment member on said opposing second surface of said substrate;

said adhesive setting during a set up period while said adhesive layer holds said attachment member against movement resulting from the weight of said substrate and said attachment member and/or from application of a relatively slight force; and

allowing said adhesive layer to cure, said cured adhesive layer bonding said attachment member to said first glass surface prior to installation of said assembly in the vehicle.

-154-

The method of claim 153 wherein said metering includes dispensing said isocyanate and polyol components with gear pump-based dispensing units.

-155-

The method of claim 154 wherein said gear pump based dispensing units include gears which are set to dispense said isocyanate and polyol components prior to said mixing at a ratio of 1.3 parts isocyanate component to 1 part polyol component.

-156-

The method of claim 154 wherein said mixing includes directing said components through a static mix tube in association with a sequential reverse static mixer.

-157-

The method of claim 156 including directing said components to said dispensing units, mix tube and static mixer with thermally controlled conduits whereby said components are maintained at about 95°F.

-158-

The method of claim 153 including mixing said metered volumes of said components with at least one of a static mix tube and a dynamic mix head.

-159-

The method of claim 153 wherein said metering includes maintaining the volume of each of said components constant for a specific flow rate such that the ratio of said isocyanate component to said polyol component remains unchanged as the total dispensed volume and flow rate change.

-160-

The method of claim 153 further including robotically applying at least one of an adhesion promoting compound and a primer to a portion of said first glass surface prior to positioning said attachment member and said substrate with said layer of adhesive therebetween.

-161-

The method of claim 160 wherein said robotic application includes applying said adhesion promoting compound in liquid form with a programmable robot fixtured with a liquid application device.

-162-

The method of claim 161 including programming said robot to obtain a piece of material from a dispenser, and wiping said material across said portion of said first glass surface while said material is loaded with said adhesion promoting compound.

-163-

The method of claim 162 including pumping a small volume of a silane based adhesion promoting compound to the surface of said material during said wiping such that a wet streak of said adhesion promoting compound is formed on said portion of said first glass surface, and allowing said adhesion promoting compound to flash off said first glass surface.

-164-

The method of claim 153 including robotically applying a primer composition to said portion of said first glass surface.

-165-

The method of claim 164 wherein said robotic application of said primer composition includes applying said primer composition in liquid form with a programmable robot fixtured with a liquid application device.

-166-

The method of claim 165 including programming said robot to obtain a piece of material from a dispenser, and wiping said material across said portion of said first glass surface while said material is loaded with said primer composition.

-167-

The method of claim 166 including pumping a small volume of a urethane primer to the surface of said material during said wiping such that a wet streak of said primer composition is formed on said portion of said first glass surface, and allowing said primer composition to flash off said first glass surface.

-168-

The method of claim 164 wherein said positioning includes acquiring said attachment member with said robot and locating said attachment member on said portion of said first glass surface within about 30 seconds after said adhesive is deposited on said at least one of said attachment member mounting surface and said first glass surface.

-169-

The method of claim 168 including holding said attachment member against said substrate with said robot for a time period less than or equal to about 30 seconds after said positioning of said attachment member.

#### REMARKS

Claims 1-130, as originally filed in the grandparent application, have been canceled herein and new claims 131-169 have been added. Examination on the basis of claims 131-169 is respectfully requested.

In addition, the specification has been amended to add a Cross Reference to the prior applications from which this application is continued, and to add the patent number of the application referenced on page 19.

New claims 131-169 are fully supported by the application as originally filed.

No new matter has been added.


Accordingly, examination on the basis of new claims 131-169 and a Notice of Allowance is respectfully requested.

Respectfully submitted,

JEFFREY A. LEWNO

By: Van Dyke, Gardner, Linn & Burkhart, LLP

Date 12/17/98

  
Donald S. Gardner  
Registration No. 25 975  
2851 Charlevoix Drive, S.E.  
P.O. Box 888695  
Grand Rapids, MI 49588-8695  
(616) 975-5500

DSG/ram

09243706 434798  
B6/T3T" 90/ET260

**BONDED VEHICULAR GLASS ASSEMBLIES UTILIZING TWO-COMPONENT  
URETHANES, AND RELATED METHODS OF BONDING**

**FIELD OF THE INVENTION**

The present invention relates to bonded vehicular assemblies comprising glass and  
5 other materials that utilize a two-component urethane adhesive to bond dynamic load-bearing  
attachment members to a panel surface to form a joint suitable for use in a vehicle. In  
addition, the present invention provides methods of bonding vehicular glass assemblies  
utilizing the class of adhesives described herein.

**BACKGROUND OF THE INVENTION**

10 Vehicular glass assemblies, particularly large movable van windows, often have one  
or more components such as hinges or clevises affixed to the glass panel. When such  
assemblies are installed in vehicles, the assembly components and affixment means are often  
subjected to highly localized loads including dynamic loads, resulting from road vibration  
and opening and closing of the glass assembly. Therefore, original equipment manufacturer  
15 (OEM) specifications, utilized by most automotive companies to ensure that components  
supplied are suitable for use in vehicles, have required that components affixed to vehicular  
glass be able to withstand relatively high loads and severe vibration. At present, the primary  
method by which to attach such components that meets OEM specifications is by mechanical  
affixment of the component, e.g., hinge or clevis, to the glass panel. Typically, such  
20 mechanical affixment requires forming one or more holes through the glass panel, inserting  
component fasteners, and then mechanically attaching the components to the glass via the  
fasteners. In some applications involving wrap-around hinges, the formation of holes is  
avoided by positioning the hinge over a portion of the outer edge of the glass panel and  
clamping the hinge to the panel by use of one or more fasteners.

Neither of these approaches is entirely satisfactory in that each is relatively expensive due to the significant amount of time and labor involved in drilling holes and inserting or clamping fasteners, notwithstanding the cost of the additional fasteners or clamps.

Moreover, mechanical affixment of components to glass necessitates the use of a mounting member or fastener on the opposite side of the glass from which the component is residing. This is undesirable in terms of both cosmetic appeal and resulting aerodynamics if the mounting member or fastener projects from the exterior surface of the glass panel, particularly as automotive designers strive to improve vehicle aesthetics and aerodynamics such as is useful, for example, in flush glazing of vehicles.

Single-component urethane adhesives have been used as a window fixing adhesive to bond glass panels to an automobile body and for mounting glass mounting members. Such adhesives have also been used to attach studs, mirror mounting buttons, and the like to automotive glazing. As known to those skilled in the art, a single-component urethane adhesive utilizes a highly prepolymerized isocyanate-rich urethane (typically formed from reacting an isocyanate with a polyol) typically mixed with an isocyanate (usually a polymeric isocyanate). The adhesive initially "sets" and finally "cures" when exposed to moisture in the air which causes the isocyanate moieties to cross-link with the urethane prepolymer(s) via a urea cross-linking reaction. The process usually requires several hours for the adhesive to set and several days for a complete cure to be effected. Such long set and cure periods present challenges when used in high production rate processes, such as automobile module assembly, because curing of the system typically requires temporary or permanent fixturing of the glass or mounting member(s), thus adding cost and extraneous equipment to the manufacturing process. Curing of single-component urethanes may also require the use of humidity chambers, and in certain cases, the addition of heat to accelerate bonding which further adds cost, time, inventory, handling, and complexity to the manufacturing process.



Additionally, single-component urethanes, when employed as a window fixing adhesive, limit the range of applications of the resulting vehicular glass assembly. Such bonded assemblies are typically utilized so that only a relatively low load or stress occurs in the adhesive material or at the bond between the glass and the adhesive. Cured, single-  
5 component urethanes often cannot withstand highly localized loads or high stresses, particularly at extreme environmental conditions such as high temperatures, exposure to moisture, and vibration.

In another respect, single-component urethanes are not entirely satisfactory for forming bonded glass assemblies, since single-component urethanes may induce stresses on the glass upon curing. Such stress increases the likelihood of glass fracture upon application of additional external forces or other stresses thereby rendering such adhesives unsatisfactory for forming joints in dynamic load-bearing applications in a vehicle.  
10

Two-component urethane adhesive systems have been used for bonding fixed vehicle windows, such as windshields, for certain after-market applications. The term "two-  
15 component system" refers to urethane adhesive systems in which the isocyanate and polyol components are kept separate from one another until just prior to bonding at which time those components are mixed together and applied on the appropriate surfaces for bonding. Upon mixing the two components, a full urethane polymerization reaction occurs. The problems encountered with two-component systems currently recommended for after-market  
20 applications are that such systems are still relatively slow, typically requiring about 1 hour to set and about 3 days to cure, and result in a relatively weak initial bond that does not reach full cure properties for days.

At present, the automotive industry lacks a method for securely attaching load-bearing components, and particularly dynamic load-bearing components, to glass window panels that  
25 meets OEM requirements, is aesthetically appealing, is economical, and which avoids the

numerous drawbacks of utilizing mechanical attachment methods. Prior art suggestions and attempts have not resulted in any commercially successful two-component urethane adhesive that is suitable for bonding hardware components to glass panels for use in vehicles, particularly for bonding hinges, clevises, and similar attachments typically utilized in large area movable windows, such as those found in automobiles, minivans, sport utility vehicles, trucks, and buses.

### SUMMARY OF THE INVENTION

In the present invention, a vehicular window assembly suitable for use in a vehicle is provided comprising a glass panel, an attachment member, and a layer of a rapid set, rapid cure, two-component urethane adhesive. In another embodiment, the present invention provides a vehicular panel assembly also suitable for use in a vehicle, the assembly comprising a glass substrate, an attachment member, and a layer of a two-component urethane adhesive including an isocyanate component and a polyol component that form a joint suitable for use on a vehicle. The present invention also provides a moveable window assembly comprising a glass panel, an attachment member, and a layer of a rapid set, rapid cure, two-component urethane adhesive disposed between the panel and attachment member. In yet another embodiment, the present invention provides a window assembly comprising a glass panel, an attachment member, and a layer of adhesive disposed between the panel and the attachment member, in which the adhesive is capable, upon curing, to form a bond that can withstand a tensile force of at least 5 lbs/in<sup>2</sup>. The present invention also provides a hinged vehicular window assembly comprising a glass panel and a hinged mounting member that is bonded to the glass panel by the rapid set, rapid cure, two-component urethane adhesive. The present invention further provides a movable window assembly comprising a glass panel and an attachment member bonded to the glass panel by an adhesive comprising an isocyanate component and a polyol component. Moreover, the present invention provides

a positionable sunroof, a movable door lift window assembly, a liftgate window assembly, and a sliding window assembly all utilizing the adhesives described herein.

The invention also provides a method of adhering an attachment member to a glass surface comprising, in part, depositing the rapid set, rapid cure, two-component urethane adhesive between the attachment member and glass surface and allowing the adhesive to cure. In another embodiment, a method is provided to adhere an attachment member to a glass substrate having a frit layer formed on the glass substrate, by use of the rapid set, rapid cure, two-component urethane adhesive.

The previously described assemblies meet or exceed OEM requirements and can withstand highly localized loads when installed and subjected to typical use in a vehicle.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross section of a vehicular window assembly comprising a layer of glass bonded to another material by a layer of a preferred embodiment adhesive described herein;

Fig. 2 is a perspective view of a preferred embodiment movable vehicular window assembly mounted as a side window in a vehicle;

Fig. 3 is a side elevational view of an exterior surface of the vehicular window assembly depicted in Fig. 2;

Fig. 4 is a side elevational view of the opposite, inner surface of the vehicular window assembly shown in Fig. 3;

Fig. 5 is a perspective view of a mounting component bonded to a glass panel by a layer of a preferred embodiment adhesive;

Fig. 6 is a cross section of the assembly depicted in Fig. 5;

Fig. 7 is an elevational view of a window panel having a perimeter gasket bonded to glass substrate by the preferred embodiment adhesive;

Fig. 8 is a cross section of the window depicted in Fig. 7 taken at line VIII-VIII;

Fig. 9 is a graph of maximum torque values measured for a most preferred embodiment adhesive and various single-component urethane adhesives that were tested;

Fig. 10 is a graph of shear values versus cure time for the most preferred embodiment adhesive;

5 Fig. 11 is a graph of shear values versus cure time for a conventional single-component urethane adhesive;

Fig. 12 is an elevational view of a vehicular side door illustrating a movable vehicular glass assembly, lift mechanism, and a fixed vent window assembly;

10 Fig. 13 is a cross-sectional view of a first embodiment of a lift bracket bonded to a glass panel by a layer of the preferred embodiment adhesive;

Fig. 14 is a cross-sectional view of a second embodiment of a lift bracket bonded to a glass panel by a layer of the preferred embodiment adhesive;

Fig. 15 is an elevational view of the fixed window assembly depicted in Fig. 12 comprising a rail bonded to a side of a glass panel by the preferred embodiment adhesive;

15 Fig. 16 is a cross section of the assembly depicted in Fig. 15 taken at line XVI-XVI;

Fig. 17 is a side view of a vehicular glass assembly comprising a guide pin bonded to a glass panel by a layer of the preferred embodiment adhesive;

20 Fig. 18 is an elevational view of an alternate embodiment for a movable vehicular glass assembly and lift mechanism comprising a plurality of lift brackets bonded to a glass panel by the preferred embodiment adhesive;

Fig. 19 is a plan view of a vehicle having a sunroof that comprises various components bonded to a glass panel by the preferred embodiment adhesive;

25 Fig. 20 is an elevational view of a glass panel suitable for fixed mounting to a vehicle, wherein the panel has a plurality of mounting components bonded to one of its surfaces by the preferred embodiment adhesive;

Fig. 21 is a perspective view of a portion of the panel depicted in Fig. 20, illustrating in greater detail one or more mounting components bonded to the glass surface;

Fig. 22 is a perspective view of a liftgate assembly installed in a vehicle and comprising a plurality of components bonded to a glass panel by the preferred embodiment adhesive;

Fig. 23 is a partial cross-sectional view of the liftgate assembly depicted in Fig. 22, illustrating in greater detail the bonding of components to the glass panel;

Fig. 24 is a perspective view of a sliding window assembly in a vehicle;

Fig. 25 is a perspective view of an alternate embodiment of a sliding window assembly comprising latch components bonded to glass panels by the preferred embodiment adhesive;

Fig. 26 is an elevational view of the sliding window assembly depicted in Fig. 24, illustrating guide tracks bonded to the upper and lower regions of a glass panel and a closure fixture bonded to a glass panel by the preferred embodiment adhesive;

Fig. 27 is a partial cross section taken along line XXVII-XXVII in Fig. 26, illustrating in greater detail the configuration of the multiple panel sliding window assembly;

Fig. 28 is a partial cross section taken along line XXVIII-XXVIII in Fig. 26, illustrating additional aspects of the configuration of the multiple panel sliding window assembly;

Fig. 29 is a partial cross section taken along line XXIX-XXIX in Fig. 26, illustrating further aspects of the multiple panel sliding window assembly;

Fig. 30 is an exploded, perspective view of a hinge component bonded to a glass panel by a layer of the preferred embodiment adhesive;

Fig. 31 is an end view taken along line XXXI-XXXI of the assembly illustrated in Fig. 30;

Fig. 32 is an elevational view of the hinge component bonded to the glass panel of the liftgate assembly depicted in Fig. 22;

Fig. 33 is partial cross-sectional view of the hinged connection between the liftgate assembly and the vehicle depicted in Fig. 22;

5 Fig. 34 is a detail of the track of the sliding window assembly illustrated in Fig. 27; and

Fig. 35 is a view of an alternate sliding window assembly, detailing a single channel track.

### DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 A preferred embodiment of one aspect of the present invention for bonded glass assemblies is an automobile glass panel having a layer of a rapid set, rapid cure, two-component urethane disposed on the glass panel. Layers of such adhesives and others described herein have remarkable characteristics upon curing that enable them to be used as joints on automobiles. Fig. 1 illustrates a cross section of a vehicular window assembly 1  
15 comprising a glass substrate 2 and an attachment member 3 bonded thereto by a layer 4 of the rapid set, rapid cure, two-component urethane adhesive disposed between the glass substrate and the attachment member or portions thereof.

In many of the preferred embodiments described herein, the two-component urethane adhesives utilized are "rapid set," and "rapid cure." Rapid set refers to a property exhibited  
20 by the two-component system, such that after mixing the components and relatively promptly contacting the adhesive mixture with the objects to be bonded together, the objects are held by the adhesive against movement resulting from their own weight or movement resulting from application of a relatively slight force, within about 3 minutes or less, preferably within about 90 seconds or less, and most preferably within about 45 seconds or less from the time  
25 of mixing and application of the adhesive to the objects.

00243706-134798

The term "rapid cure" refers to a cure time of less than about 60 minutes, preferably less than about 50 minutes, and most preferably less than about 40 minutes. That is, at least about 80%, preferably at least about 90%, and most preferably at least about 95% of the physical characteristics of the cured adhesives are obtained within about 60 minutes from the time of achieving the set phase of the adhesive. These two-component urethanes described herein fully cure, or substantially so, within the time periods referred to for rapid cure. That is, the average molecular weight of the polyurethane chains and degree of cross-linking in the adhesive matrix does not significantly change after the period of rapid cure.

The rapid set, rapid cure, two-component adhesives described in greater detail herein will find numerous applications in high production rate manufacturing processes, thereby often eliminating the requirement of fixturing bonded components and otherwise hindering the manufacturing process. These adhesives will withstand relatively high tensile, torque, or shear loads, extreme vibration even under high temperatures and after extended aging and thermal cycling, and resistance to adverse environmental conditions encountered by vehicular window assemblies. The rapid set, rapid cure, two-component urethanes described herein are able to withstand tensile and shear forces of at least 500 psi, preferably 700 psi, and most preferably 800 psi, without separation from the underlying glass surface or breakage of the glass substrate. These adhesives described in greater detail herein, have been found to be useful for forming bonded assemblies comprising glass and dynamic load-bearing attachment members having low surface area mounting footprints, that are able to withstand relatively high loads or other stresses, significantly beyond the ability of conventional single-component urethanes. Such low surface area mounting footprints are preferably less than about 6 in<sup>2</sup>, and in some instances, may be less than about 1 in<sup>2</sup>. In addition, it has surprisingly been discovered that these adhesives do not impart deleterious amounts of stress to the glass substrate to which they are bonded.

0943306 134333  
852727 9043260

Frequent reference is made herein to bonding "attachment members" to glass. The term "attachment member" as used herein refers to any part, accessory, or constituent thereof, to be bonded to glass. In the context of vehicular window assemblies, reference to attachment members includes, but is not limited to, mounting components, hinges, clevises, latches, lift brackets, division bars, guide tracks, handles, guide pins, strut-mounting hardware, strikers, brake lights, power-mounting hardware, rails, gaskets, antennas, wiper mounts, cosmetic articles, and particularly to dynamic load-bearing components having a relatively low surface area mounting footprint. In addition, reference to attachment members includes, but is not limited to, interior accessories such as rearview mirrors, mounting fixtures, and other components suitable for use in automobile passenger compartments.

The preferred embodiment bonded assemblies of glass and attachment member(s), include an automobile glass panel that is bonded by an effective amount of a preferred embodiment adhesive described herein to a mounting component, for example a metal component, affixed to a surface of an automobile body. Fig. 2 illustrates a preferred embodiment movable window or panel assembly 12 disposed in a vehicle 10 within a window opening 14 formed in the vehicle exterior 16. Window assembly 12 comprises a panel 24 that is preferably transparent glass, and one or more mounting members 30 and 32, bonded to panel 24 by the preferred embodiment adhesive, i.e., the rapid set, rapid cure, two-component urethane adhesive described herein. Window assembly 12 is adapted to articulate or pivot about a pair of mounting members 30 positioned approximate to peripheral edge 18 of inside surface 22 of panel 24. Panel assembly 12 is opened or closed about mounting members 30 by a second mounting member 32 interconnecting the vehicle 10 to panel assembly 12. Although panel assembly 12 is shown pivoting about an axis proximate to the leading peripheral edge 18, it is contemplated that various panels such as a rear window or tailgate window may be configured to articulate about a horizontal axis as well.



09243705-13798  
854747 904E260

Figs. 3 and 4 illustrate in greater detail window assembly 12. Panel 24 is preferably transparent glass which is typically tempered, but may be laminated, or otherwise strengthened using conventional techniques and principles. Panel 24 may be curved, bent or generally planar, having two substantially parallel sides, surfaces, or faces 20, 22 terminating in a peripheral edge 18. Although transparent glass is preferred, other sheet-like panel materials may also be used such as opaque or coated glass, privacy glass, glass with a layer of ceramic frit, tinted glass, solar tinted glass, transparent, coated or opaque plastic materials, or multi-composite laminates, such as transparent glass and plastic. Additional details and variations of vehicular window assemblies are described in a copending application to the same assignee as the present application, Serial No. 08/129,671 filed September 30, 1993, which is herein incorporated by reference.

Figs. 5 and 6 illustrate mounting component 50 bonded to a glass substrate 60 by a layer of rapid set, rapid cure, two-component urethane adhesive 70 as provided by the present invention. Component 50 is typical of a mounting component for attachment to glass substrate 60, and comprises a base portion 52 having one or more optional apertures 54, and a threaded member 56 for engagement with another component or the vehicle. This bonded assembly, when utilized in a vehicular window application, will likely be subjected to highly localized loads and thus high stresses will be imparted to the adhesive. Accordingly, it is recommended to utilize the rapid set, rapid cure, two-component adhesive due to its surprisingly high strength and ability to not impart deleterious amounts of stress on the underlying glass substrate. A layer of adhesion promoter and/or primer may be utilized to further improve and promote the bonding characteristics of the resulting assembly, as described in greater detail herein. Figs. 5 and 6 illustrate such an embodiment comprising adhesion promoter layer 80 and primer layer 90.

09243706-134798  
862727 904E1260

The preferred embodiment adhesives described herein may be utilized to bond gaskets to glass panels for fixed mounting applications. Figure 7 is an elevational view of a vehicular window assembly 100 comprising a glass panel 110 having a gasket 120 disposed along its perimeter. Gasket 120 is bonded to panel 110 by a layer 130 of the preferred  
5 embodiment rapid set, rapid cure, two-component urethane adhesive. Glass panel 110 may be any glass type or similar panel as previously described. Gasket 120 is typically a rigid polymeric material, however a flexible polymeric material could also be used. An example of a suitable rigid material for a perimeter gasket is polyethylene terephthalate. Fig. 8 illustrates a cross section of a portion of assembly 100 taken at line VIII-VIII in Fig. 7. Fig.  
10 8 illustrates a typical configuration of a window gasket bonded to a glass panel. Gasket 120 may contain one or more fasteners 135 projecting outward from the glass panel for subsequent attachment to a vehicle mounting surface or to another member.

The bonded assemblies described herein are particularly well suited for use as movable vehicular window assemblies. Such assemblies may find application as hinged  
15 window assemblies, sunroofs, door lift window assemblies, liftgates and sliding window assemblies. The assemblies may be utilized as movable windows in which one or more glass panel(s), preferably with one or more mounting or hinge-like components, are positionable with respect to a vehicular mounting surface. In many of these embodiments, a first portion of a positionable member, e.g., hinge or hinged assembly, is bonded to a glass panel by an  
20 effective amount of the adhesives described herein. Another portion of the member is affixed or connected to a vehicular mounting surface or other intermediate surface. These various embodiments are described in greater detail as follows.

Fig. 12 illustrates a movable vehicular glass assembly 150 utilized as a vertically positionable door lift window in a vehicle side door 152. Assembly 150 comprises a lift  
25 bracket 154 bonded to a lower portion of a glass panel 156 by a layer of the preferred

embodiment adhesive. As will be appreciated by those skilled in the art, lift bracket 154 is operably connected to one or more lifting members 158 of the window lift mechanism (not shown). Figs. 13 and 14 are cross sections of two possible embodiments of lift brackets that can be bonded to glass in accordance with the present invention. Fig. 13 illustrates a lift bracket 160 that supports glass panel 156 on a plurality of sides, and which preferably is bonded to panel 156 on each of those sides by a layer 162 of the preferred embodiment adhesive. Fig. 14 illustrates another embodiment of a lift bracket 164 bonded to glass panel 156 by a layer 166 of the preferred embodiment adhesive.

Fig. 12 further illustrates a fixed vent window assembly 170 installed in side door 152. Assembly 170 comprises a division bar 172 bonded to an exposed edge of glass panel 174, preferably adjacent movable glass panel 156. Figs. 15 and 16 illustrate in greater detail fixed vent window assembly 170 comprising division bar or rail 172 bonded to an edge of glass panel 174 by a layer 176 of the preferred embodiment adhesive.

Fig. 12 further illustrates a guide pin 178 bonded to glass panel 156 by the preferred embodiment adhesive. Fig. 17 illustrates a typical vehicular glass assembly 180 comprising an alternate embodiment guide pin 182 bonded to a surface of a glass panel 184 by a layer 186 of the preferred embodiment adhesive.

Fig. 18 illustrates an alternate embodiment of a movable vehicular glass assembly 190 and lift mechanism 200. Assembly 190 comprises a plurality of lift brackets 202 bonded to a portion of a glass panel 204 by an effective amount of the preferred embodiment adhesive. Lift mechanism 200 is preferably engaged with panel 204 at each lift bracket 202.

Fig. 19 illustrates another embodiment of a movable window assembly in accordance with the present invention. Movable sunroof assembly 210 comprises one or more mounting components 212, which typically are hinges, bonded to a glass panel 214 by the preferred embodiment adhesive, and affixed to vehicle 216, as similarly described with respect to

hinges 30 of assembly 12 depicted in Figs. 2-4. Sunroof assembly 210 may further comprise a latch member 218 for locking the window closed, or maintaining panel 214 in a particular position when the sunroof is open.

As previously described, the present invention also encompasses fixed window assemblies that are affixed to or otherwise secured to one or more vehicle mounting surfaces. The preferred embodiment adhesives are well suited for bonding mounting components to glass for such fixed mounting application. Figs. 20 and 21 illustrate a glass panel 220 suitable for fixed mounting to a vehicle, wherein the panel has a plurality of mounting components 222 bonded to one or more surfaces of panel 220 by a layer 224 of the preferred embodiment adhesive.

Figs. 22 and 23 illustrate a liftgate assembly 230 installed in a vehicle 232. Liftgate assembly 230 comprises a glass panel 234 having a plurality of components bonded to it such as struts 236, hinges 238, latches 240, and a handle 242. An effective amount or layer 244 of the preferred adhesive as described in greater detail herein is utilized to bond components 236, 238, 240, and 242 to glass panel 234. Figs. 32 and 33 illustrate in greater detail the portion of liftgate assembly 230 having hinge 238 bonded to panel 234 and secured to vehicle 232 depicted in Figs. 22 and 23. Hinge 238 comprises a mounting member 310 hingedly coupled to a base member 312 via a pin 314. Glass panel 234 is bonded to hinge mounting member 310 by a layer 244 of the preferred embodiment adhesive. Hinge base member 312 may be affixed to vehicle 232 in a variety of fashions, such as by one or more threaded fasteners 318. As will be appreciated by those skilled in the art, it may be desirable to utilize a gasket 320 disposed around the perimeter of the vehicle opening over which the panel or liftgate covers.

Fig. 24 illustrates a preferred embodiment sliding window assembly 250 installed as a rear window in a truck 252. As is explained in greater detail below, assembly 250 comprises a plurality of glass panels 253, 254, and 255, such that at least one of the panels is slidably positionable along one or more tracks.

5 Figs. 26-29 and 34 illustrate in greater detail window assembly 250 shown in Fig. 24. Assembly 250 comprises a plurality of glass panels such as panels 253, 254, and 255, that are either bonded by the preferred adhesive to one or more track members 256, 257, or are slidably positionable therein. Track members 256 and 257 are channelled members adapted to receive panels 253, 254, and 255. As illustrated in Figs. 26 and 27, it is preferred that  
10 one or more panels, such as panel 253 and panel 255 be bonded along their upper peripheral edges to upper track member 256, and be bonded along their lower peripheral edges to lower track member 257 by a layer of the preferred embodiment adhesive 258. Panel 254 is preferably not bonded to either track member so that it is slidably positionable within those tracks. Depending upon the configuration of assembly 250, panel 254 may be slid alongside  
15 either or both panels 253 and 255. Assembly 250 may further comprise a latch member 259 bonded to one of the glass panels of assembly 250, such as panel 254, and a corresponding pin member 260 bonded to an adjacent corresponding glass panel, such as panel 255. Latch 259 and pin 260 are bonded to glass panels 254 and 255, respectively, by a layer 261 of the preferred embodiment adhesive. Assembly 250 may further comprise one or more sealing  
20 members disposed on the lateral edges of the slidable panel, to provide a seal between adjacent panels and thereby minimize drafts or other undesirable phenomena such as wind noise when assembly 250 is in a moving vehicle. Moreover, the sealing members may also be configured to provide a handle or edge that can be readily grasped to facilitate the positioning of a panel. Figs. 26 and 28 illustrate glass panel 254 having sealing members  
25 262 and 263 bonded to the lateral peripheral edges of panel 254 by a layer 264 of the

preferred embodiment adhesive. Sealing members 262 and 263 are preferably configured to provide a channel or receiving surface 265 to bond to the edge of panel 254, a sealing portion 266 or lip which sealingly engages an adjacent panel, and a handle portion 267 adapted for easy grasping by a user wishing to slide glass panel 254 along tracks 256 and 257. As best illustrated in Fig. 34, a glide member 350 is preferably disposed in track member 257 to facilitate sliding panel 254 in the channel provided by track 257. Glide member 350 is preferably formed from a low friction plastic.

Fig. 25 illustrates an alternate embodiment of a sliding window assembly 270, in which at least one of glass panels 272 and 274 is slidably positionable along a track (not shown) such that panels 272 and 274 can be moved away from one another, e.g. to allow air to pass between a passenger compartment and the outside environment, or can be abutted against one another, or substantially so, to prevent air passage, e.g., to prevent loss of heated or cooled air in the passenger compartment. Fig. 25 further illustrates latch and pin components 276 and 278, respectively, that lock or otherwise secure panels 272 and 274 to one another. Latch 276 and pin 278 components are bonded to panels 272 and 274 by the preferred embodiment adhesive.

Fig. 35 illustrates an alternate embodiment of a sliding window assembly in which a single channel track 360 is bonded to a glass panel 364 by a layer 366 of the preferred embodiment adhesive. Disposed between the peripheral edge of glass panel 362 and track 360 is previously described glide member 350 to facilitate sliding of panel 362. When installed in a vehicle, panel 364 may be either fixed or movable with respect to the vehicle.

Figs. 30 and 31 illustrate a preferred embodiment of a hinge component 300 bonded to a glass panel 301 by a layer 302 of the preferred embodiment adhesive. Hinge component 300 comprises a mounting member 305 for contacting the layer of adhesive 302, a member 306 for affixment to a vehicle mounting surface 307 via threaded fastener 308. Hinge 300

has a flexible U-shaped region connecting mounting member 305 to member 306, which provides relative movement between members 305 and 306. Hinge 300, as will be appreciated from Figs. 30 and 31, is ideally suited for providing hinged affixment between a panel and a vehicle for applications where the panel travel is less than about 20 degrees about the hinge axis. Examples of such applications include the side window shown in Fig. 2.

The rapid set, rapid cure, two-component urethane adhesives described herein exhibit surprising and remarkable ability to rapidly bond glass to other materials in such a manner that the resulting bond can withstand highly localized loads without failing. As previously explained, many new window designs require attachment of mounting members or other attachment members to glass which results in highly concentrated static loads and/or dynamic loads at the adhesive bond, as might be the case in a movable window. Often, there is minimal available surface area on the glass or attachment member for bonding. Such minimal surface area limits the available area for distributing these loads and stresses over the adhesive bond. It is even more remarkable that the bonded assemblies described herein, particularly those utilizing the preferred adhesives, retain their bonded configuration under high loads, while concurrently subjected to adverse conditions such as water immersion, vibration, and temperature extremes. It has been found that bonded assemblies utilizing the rapid set, rapid cure, two-component adhesive described herein can withstand localized static tensile loads of at least 5 lbs/in<sup>2</sup> and as high as about 40 lbs/in<sup>2</sup>, and in some instances significantly higher loads such as 80 lbs/in<sup>2</sup>, without failing as applied within OEM ranges of -40° C to 100° C.

A wide array of materials may be bonded to glass by use of the preferred adhesives described herein. Such materials may include for example metals, coated metals, plastics, coated plastics, or composites or combinations thereof.

09243706 134798  
354737 3047260

The thickness of the adhesive layer generally depends upon the end use applications for the bonded assembly, the surface characteristics of the glass substrate and the attachment member to be bonded to the glass, and the required bond strengths. If the adhesive layer is too thick, elongation of the adhesive layer, for instance upon application of a shear stress, allows movement between the bonded components or substrates and may result in creep and/or peel. If the adhesive layer is too thin, the bonded assembly may have poor durability, insufficient squeeze out or component coverage, or other phenomena in which adhesive material migrates away from the bond interface. Moreover, if the thickness of the adhesive layer is not uniform, there may be regions on the surfaces of the bonded components that have insufficient coverage of adhesive, thereby resulting in voids or other undesirable variations in coverage. The preferred thickness for the adhesive layer is from about 0.01 mm to about 4.0 mm, more preferred being from about 0.25 mm to about 2.0 mm, and the most preferred thickness being about 0.5 mm to about 1.0 mm.

The preferred embodiment method of adhering attachment members to glass substrates is to prime the glass surface, and deposit an effective amount of a preferred embodiment adhesive described herein on one or both surfaces of the attachment member and primed glass substrate to be bonded, and place the attachment member and substrate in the desired position for bonding. The term "effective amount" refers to an amount of adhesive such that the attachment member that is adhered to the substrate is securely bonded thereto after curing of the adhesive. Typically, an effective amount is an amount that results in an adhesive layer thickness of between about 0.01 mm and about 4.0 mm, more preferably about 0.25 mm to about 2.0 mm, and most preferably from about 0.5 mm to about 1.0 mm.

Preferably, the adhesive is applied to a glass frit layer which is applied to the glass panel. Thus, in forming the glass assemblies described herein, it is preferred that the various assemblies comprise such a glass frit layer on the surface of the glass substrate. The frit



layer helps to shield the adhesive applied thereto from the ultraviolet radiation of sunlight. Exemplary descriptions of forming frit layers on glass surfaces are provided in United States patent application Serial No. 07/898,094 filed June 12, 1992, now issued as United States patent \_\_\_\_\_, which is herein incorporated by reference.

5            Optionally, the surface of the glass to be bonded may be cleaned prior to bonding such as by washing with isopropyl alcohol or a suitable detergent followed by drying. Similarly, the surface of the component or other substrate to be bonded to the glass may also be washed and dried prior to bonding.

10           Referring again to Figs. 2-4, the preferred adhesive, i.e., the rapid set, rapid cure, two-component urethane adhesive, may be utilized to bond window assembly 12 attachment members such as hinges, mounting members, latches, and handles to glass panel 24 for subsequent attachment of window assembly 12 to vehicle 10. In order to form such bonds, an effective amount of the adhesive is deposited on the attachment member to be bonded, and/or to the appropriate area of the glass at which the attachment member is to be bonded.  
15           The attachment member is then engaged with the glass via the adhesive, and adhesive allowed to set. Upon curing, a strong, durable bond is formed between the attachment member and the glass.

20           The preferred adhesive dispensing method is performed by using a metering unit and a mixing unit to both mix and dispense the adhesive. The metering unit should preferably dispense a very accurately controlled volume of each component to the mixing unit. This volume must be constant for a specific flow rate such that the ratio of the isocyanate component to the polyol component does not change as the total dispensed volume and flow rate change. Preferred metering units are gear pump-based dispensing units such as those supplied by EMC<sup>2</sup> of Sterling Heights, Michigan. The most preferred metering units are  
25           adjustable gear pump-based units. The preferred mixing unit may be either a static mix tube

09243706 "134798  
or a dynamic urethane RIM mix head like those supplied by Admiral of Canton, Ohio; Cannon of Mars, Pennsylvania; Kraus Maffai of Germany, and others. For applications involving most automotive bonded assemblies, the most preferred mixing unit is a static mix tube 0.25 inches in diameter and 6 inches long, in association with a 24 element KINEX®, a sequential reverse static mixer.

In order to promote uniformity and accuracy of dispense volume, mixing, and ratio control, it is most preferred that the isocyanate and polyol components of the adhesives described herein be delivered to the dispense metering unit and mixing unit through thermally controlled lines, such as those provided by Hart Ind. Supply of Middletown, Ohio.

It is also preferred that the adhesive material be deposited upon the glass or attachment members to be adhered to the glass, with the aid of a robot. Robotic deposition or other automatic procedures promote repeatability in both application and open time control that manual operation may not be able to deliver. An example of forming a bonded vehicular glass assembly by robotic assembly is described in greater detail below.

It may also be desirable to accelerate the set and cure times of the adhesive. Acceleration of adhesive set and cure times can be accomplished by heating and/or by utilizing chemical agents. The use of chemical agents is discussed in greater detail below. Acceleration by heating may be performed by induction curing, infra red heating, or other methods of heating the adhesive.

In the preferred embodiment of the two-component urethane adhesives described herein, the polyol component utilized includes one or more polyols and one or more high amine density plural amine compounds, hereinafter referred to as HADPACs. The preferred amount of HADPAC typically ranges from about 2% to about 20%, and most preferably from about 5% to about 10% by weight of the polyol component. In addition, the adhesives utilize a filler agent in either the polyol component, the isocyanate component, or both. The

filler agent is preferably utilized in an amount from about 15% to about 50% of the total weight of the polyol and isocyanate components. Moreover, the adhesives preferably utilize a particular ratio of isocyanate functionality to hydroxy and/or amino functionality of from about 0.9 to about 2.0, more preferably from about 1.03 to about 1.4, and most preferably from about 1.1 to about 1.3.

A HADPAC is a high amine density plural amine compound that may be either aromatic or nonaromatic, having an amine to carbon ratio of from about 1.0 to about 0.25:1 with the provisos that the compound (a) contain at least 3 amine groups, except if the compound is aromatic, then the compound may contain as few as 2 amine groups due to plate-like stacking phenomenon and (b) the compound contain from 2 to 24 carbon atoms. The molecular weight range for these amines typically ranges from about 115 to about 5000, and more preferably from about 210 to about 290. A particularly preferred HADPAC is a penta-amine or hexamine containing 11 or 12 carbon atoms, such as the aminated reaction product of pentaerythritol, glucose, or sucrose. The most preferred HADPAC is aminated sucrose or aminated pentaerythritol. The amination reaction may be performed by reacting pentaerythritol, glucose, or sucrose, with an excess of, for example, but not limited to, ammonia, methyl amine, ethyl amine, and other amino alkanes of the formula  $C_xH_nNH_2$  where x ranges from about 1 to about 20, and n is such that the alkane is fully saturated. In a preferred embodiment, x is from about 1 to about 6, and most preferably, from about 1 to about 3.

As will be appreciated by those skilled in the art, during formation and isolation of a HADPAC, there will typically be a distribution of compounds accompanying the HADPAC. Thus, it is recognized that the function of the HADPAC in the adhesives described herein stems from not only from the HADPAC, but also from the distribution of related compounds accompanying the HADPAC.

Although not wishing to be bound to any particular theory, it is believed that upon curing of the adhesives described herein, cross-linking occurs between the HADPACs, and isocyanate groups to a degree such that a higher cross-link density is achieved in the preferred embodiment adhesives as compared to most other urethane adhesives. The polyols in the polyol component may include polyols such as diols, triols, tetrols, pentols, hexols, heptols, and octols. Examples of polyol compounds that may be employed in the polyol component include, but are not limited to, propylene glycol, ethylene glycol, glycerine, trimethylolpropane, 1,2,6-hexanetriol, pentaerythritol, methyl glucoside, sorbitol, and sucrose. It is envisioned that a wide array of polyalkylene glycols (ethylene, diethylene, dipropylene), various glycerine triols and trimethylol propanes, and derivatives thereof could be utilized. Other preferred polyols include polyether or polyester polyols with hydroxyl equivalent weights (hydroxyl equivalent weight is the molecular weight per hydroxyl group in the compound) of between about 50 and about 2000, such as a blend of diols, triols, and pentols and sucrose initiated polyols. For end use applications expected to be exposed to water or moisture, polyether polyols are especially preferred in view of their relatively high degree of hydrolytic stability.

In addition to the previously noted preferred HADPAC, other amines may be utilized in the polyol component. Such amines may be formed by reaction between propylene oxide and/or ethylene oxide, and amine compounds or other nitrogen-containing compounds such as ammonia. Examples of suitable amine compounds for such reactions include, but are not limited to, triethanol amine, ethylene diamine, toluene diamine, diphenylmethane diamine, diethylenetriamine, aniline, methyldiethanolamine, triethanolamine, trispropanolamine, diethyl toluelene diamine, and other alkyl amines.

Examples of the isocyanate compounds that may be utilized in the isocyanate component include, but are not limited to, diphenylmethane diisocyanate (MDI), typically

polymeric MDI, and its isomers such as 4,4' - MDI, 2,4' - MDI and 2,2' - MDI; and tolylene diisocyanate (TDI) and its isomers. It is also possible to use other isocyanates, either alone or in combination with one or both MDI and TDI. The preferred combination of isocyanates for the isocyanate component is a majority fraction of MDI prepolymers, such as Dow Chemical's PAPI® 27, and minority fraction of monomeric isocyanates, having an iso-equivalent weight between 143 and 181 (iso-equivalent weight is the molecular weight per isocyanate group in the compound), and minority fraction of a mixture of polymeric isocyanates such as a polymeric polyisocyanate available from Dow Chemical, dimers and trimers of MDI, and alternate prepolymers of MDI.

One or more filler agents are incorporated in either the polyol component, the isocyanate component, or both. Although not wishing to be bound to any particular theory, it is believed that the filler agent creates a porous structure within the adhesive, which enables moisture to permeate into and throughout the adhesive to effect isocyanate cross-linking via urea formation with any unreacted isocyanates. The preferred amount of filler agent is from about 15% to about 50% of the total weight of the polyol and isocyanate components. More preferably, the amount of filler agent is from about 20% to about 30% of the total weight of the polyol and isocyanate components. Most preferably, the amount of filler agent is about 25% of the total weight of the polyol and isocyanate components. Examples of suitable filler agents include, but are not limited to, silicates such as magnesium silicate, silicas such as crystalline silica and quartz silica, calcium carbonate, talc and combinations thereof. The preferred filler agent is a combination of talc and silica.

A typical urethane adhesive system employs a ratio of isocyanate functionality to hydroxy and/or amino functionality of from about 1.03 to about 1.07. A ratio higher than about 1.07 leads to an adhesive which is excessively brittle and relatively slow curing. A ratio less than about 1.03 leads to a cured adhesive which is too soft for use in most

industrial applications. The preferred embodiment adhesives, it has been surprisingly discovered, utilize a ratio of isocyanate to hydroxy and/or amino functionality of from about 0.9 to about 2.0, more preferably from about 1.03 to about 1.4, and most preferably from about 1.1 to about 1.3. These ratios are desirable since by utilizing greater amounts of isocyanate, the resulting cured adhesive has greater heat resistance without sacrificing elongation or tensile strength.

A wide array of optional components may be incorporated in the preferred adhesives depending upon the application and desired end use requirements for the bonded assembly. For example, various UV blockers, stabilizers and absorbers may be incorporated in the adhesives to minimize adhesive degradation from sunlight. Chain extenders may be utilized such as ethylene glycol, butane diol, ethylene diamine, and diethyl toluene diamine. Various cross-linking agents may be utilized such as, but not limited to, oxypropionated sucrose, aliphatic amines, pentaerythritols, aminated polyols or high hydroxyl number materials such as 1,2,6-hexanetriol, 1,1,3-trimethylolpropane, and glycerine for example. In addition, pigments or colorants may be added to the adhesives. One or more diluents or thixotropic may be added to the adhesive composition to modify the viscosity and related processing characteristics of the resulting compositions. It may also be desirable that one or more additives such as thermal stabilizers, antioxidants, and surfactants may be utilized in the adhesive. All the foregoing optional components may be added to the polyol component, and where applicable, to the isocyanate component, or to both prior to mixing, or to a third or other component which can be added to the mixture prior to setting to form the desired adhesive.

Depending upon the characteristics desired for the setting and curing phases of the adhesive, it may be desirable to add one or more catalysts to accelerate the setting and curing phases. Examples of catalysts for the adhesives of the preferred embodiment include, but are

not limited to, tertiary amines such as 1,4-diazabicyclo [2,2,2] octane (triethylene diamine), N-methylmorpholine, N-ethylmorpholine, triethylamine, N-methyldiethanolamine, N,N-dimethylaminoethanol, N,N-diethylaminoethanol, triethanolamine, tetramethylguanidine, N,N,N',N'-tetramethylethylenediamine, N,N-dimethyl C<sub>10</sub> - C<sub>16</sub> amine, N,N-dimethylcyclohexylamine, N,N-dimethylpiperazine, 1,2,4-trimethylpiperazine, bis-(2-hydroxypropyl)-2-methylpiperazine, bis-(beta-dimethylaminoethyl) ether, and organotin compounds such as stannous octoate, stannous oleate, dibutyltin dilaurate, and dibutyltin diacetate.

There are commercially available urethane adhesives which exhibit the preferred rapid set, rapid cure, and high-strength characteristics, which the present inventors have discovered provide surprisingly superior bonds between glass and other components or materials. One such commercially available two-component urethane adhesive having all the above described properties, and which is the most preferred adhesive, is Essex 73100 isocyanate component, and either 73002 or 73003 polyol component available from Essex Specialty Products, Inc., a subsidiary of The Dow Chemical Company. The Essex 73100 isocyanate component comprises a proprietary polyurethane prepolymer(s) which is believed to primarily comprise prereacted, relatively long, branched chain molecules of diphenylmethane diisocyanate (MDI) reacted with a combination of relatively short and moderate chain length diols, triols, and moderate chain length diamines. It is further believed that the ends of these chain molecules are blocked with isocyanate groups, and there exists a proportion of free MDI molecules that are present and available for reaction. The 73100 component further comprises various fillers, such as magnesium silicate, crystalline silica, and calcium carbonate. The solids content and approximate amount of filler agents in the Essex 73100 component is about 24%. The Essex 73002 polyol component comprises proprietary polyurethane prepolymer(s) of polyols, diols, N-phenol diethanolamine, and a penta-amine that is initiated from

pentaerythritol and sucrose molecule, i.e., a HADPAC. The 73002 polyol component further comprises fillers, catalysts, and likely includes surfactants. The fillers are calcium carbonate and quartz silica. The catalyst is an amine-based catalyst. The solids content and approximate amount of filler agents in the 73002 component is 27%.

5           This most preferred, commercially available adhesive system has a combination of properties and characteristics that render it particularly well suited for use in forming automotive window or panel assemblies and for installing such assemblies in vehicles. The combination of properties include relatively high stability and resistance to water, minimal creep even at relatively high temperatures thereby resulting in a structurally rigid bond, 10 ability to impart remarkably low stress upon the underlying substrate upon curing, and as previously described, relatively fast set and cure times. The present inventor has further found that this adhesive provides surprisingly strong and durable bonds between glass and other materials. The inventor has further found that this adhesive is particularly well suited for forming bonds between vehicle mounting surfaces and attachment members that are 15 subjected to and which bear dynamic loads.

As previously noted, it may be desirable to utilize an adhesion promotor and/or a primer. Adhesion promoting compounds generally include silanes and amino silanes such as available from Dow Corning, Lord Chemlock, General Electric and Essex. Specific examples include diamino-tri-methoxy silanes available under the designations Lord 20 Chemlock 134/144 and similar materials from Essex such as Essex 435.18 and 435.20. Other silanes not limited to diamino or tri-methoxy forms may also be suitable. A second group of adhesion promoters are titanium or zirconium coupling agents such as available from Kenrich PetroChemical Inc. of Bayon, New Jersey, which enhance the bonding ability of the adhesive to the substrate. Alternatively, or in addition to an adhesion promoter, one 25 or more primers or single- component urethane adhesives may be used such as urethane



based, isocyanate-rich, moisture-curable, urethane prepolymers such as Morton Yokohama MS-90 available from Morton International of Ridgewood, Illinois or Essex 435.20a.

Additional examples of substrate primers include but are not limited to Essex 435.32, for applications in which the substrate to be bonded to glass is metal or plastic. Although these  
5 adhesion promoters or primers are preferred, they are not the only adhesion promoters or primers available which may be equally if not more suitable for the application.

The adhesion promoter and/or primer applied to the glass surface should form a layer having a thickness such that the entire surface of the area of the glass to be bonded, or substantially so, is wetted by the adhesion promoter or primer. The preferred thickness  
10 range for the adhesion promoter or primer materials is from about 0.01 mils to about 3.5 mils, more preferably from about 0.05 mils to about 2 mils, and most preferably from about 0.1 mils to about 1.0 mils. It is undesirable to apply an excessive amount of adhesion promoter or primer on the glass as such leads to interlayer polymeric silane cross-linking. Such silane polymerization results in a much weaker bond than the silane-urethane primer  
15 link. Many commercial suppliers for adhesion promoters or primers recommend that after application of adhesion promoter or primer to the substrate to be bonded, that excess promoter or primer material be wiped off with a clean cloth. This wipe-off step results in additional time and labor, which is clearly undesirable at the commercial level. The present inventor has found that a more desirable way of removing excess adhesion promoter or  
20 primer material after application is to allow solvents in those materials to flash off. Sufficient flash off was found to occur at ambient temperatures in a period of only from about 5 seconds to about 15 minutes.

One or more layers of adhesion promoters and/or primers are preferably applied to the glass substrate and/or other substrates or attachment members to be bonded thereto prior  
25 to bonding. A preferred combination is to utilize an amino silane adhesion promoter, such as

Essex 435.18 silane coupling agent, adjacent the glass surface, followed by a layer of a single-component urethane primer, such as Essex 435.20A primer, deposited on the layer of adhesion promoter. The adhesive is then deposited on the primer layer. It is most preferred to apply the two-component urethane adhesive to the adhesion promoter and/or primer within 96 hours of application of the adhesion promoter and/or primer to the glass surface.

A preferred embodiment bonded vehicular glass assembly suitable for use in a Chrysler minivan having a layer of frit and two hinges and a clevis bonded to a glass panel was formed by utilizing robotic assembly and deposition of adhesion promoter, primer, and adhesive as follows. A tempered glass panel is obtained, such as from MaGraw Glass of Detroit, Michigan. The glass may be of any suitable grade, such as clear glass, privacy glass, solar tint, or other grades known to those skilled in the art. The glass is coated with a frit layer, such as that available from Cerdac of Washington, Pennsylvania under the designation Cerdac 2247. The glass panel is dimensionally inspected and optically inspected for the existence of scratches, excess frit material, or other contaminating agents.

The glass panel is then placed in a retaining fixture, centered, and positioned for subsequent application of adhesion promoter. It is preferred to utilize an ABB Robot, available from ABB Robotics of Rochester Hills, Michigan, a fully programmable multi-axis servo controlled robot, for applying the adhesion promoter, primer, and adhesive. To apply adhesion promoter to the surface of the glass panel, the ABB Robot is fixtured with a Nordson Drip and Drag, a mechanical liquid application device available from Nordson Corporation of Amherst, Ohio. The ABB Robot is programmed to obtain a piece of wool felt from a spool dispenser located near, and preferably above, the fixtured glass panel and wipe the felt material impregnated or loaded with adhesion promoter across desired regions of the glass panel.

Silane adhesion promoter available from Essex under the designation Essex 435.18, is pumped in small volumes to the surface of the felt. These small volumes are referred to as stitches. The stitches are adjusted such that a sufficient volume of the adhesion promoter is present on the felt to provide a continuous wet streak of adhesion promoter on the glass surface as the felt is wiped over the panel. The amount of the adhesion promoter deposited on the panel surface should be just enough to wet the glass. The adhesion promoter is then allowed to flash off, typically for not less than 10 seconds, and not more than 5 minutes. In most instances when utilizing the Essex 435.18 adhesion promoter at room temperatures, flash off occurs in less than about 15 seconds.

After the Essex 435.18 adhesion promoter has been allowed to flash off so that the panel surface is relatively dry, a urethane primer is applied by the ABB Robot. Preferably, the primer is applied to exactly the same area to which the adhesion promoter was deposited upon. The primer is applied in the same fashion as the adhesion promoter. The primer is preferably Essex 435.20A primer.

The primer is allowed to flash off for a time period of typically between about 90 seconds up to about 96 hours. The primer thickness should be controlled to a nominal value of between about 0.1 mils and about 1.5 mils dry thickness. When utilizing Essex 435.20A primer, the typical thickness for this primer layer is between about 0.2 mils and about 0.6 mils dry thickness, and typical flash off time is about 3 minutes.

Upon drying of the primer layer, the glass panel is moved to the urethane bonding area and repositioned if necessary, in the appropriate retaining fixture. The same type of ABB Robot is also preferably programmed to acquire and position the attachment members for bonding to the concave surface of the glass panel, i.e. the two hinges and one clevis. The hinges are preferably of the type illustrated in Figs. 30-31. The hinge member for bonding to the glass panel has a mounting footprint of about 6 in<sup>2</sup>. That member also

contains a plurality of perforations to allow adhesive to flow through the perforations and thereby promote affixment of the hinge to the glass panel. The clevis is preferably of the type illustrated in Figs. 5-6. The base of the clevis has a circular mounting footprint of about 1.25 in<sup>2</sup>. The base preferably has a plurality of perforations formed in it as previously explained with regard to the hinge member.

The preferred adhesive, Essex 73100/73002 comprising 73100 polymeric isocyanate component and 73002 polymeric polyol component, is metered and mixed in a ratio of 1.3:1, respectively, by the previously described EMC<sup>2</sup> dispensing unit and KINEX 24 element static mixer. This ratio allows for an isocyanate excess, or rich mixture which sets in about 90 seconds. The gears of the EMC<sup>2</sup> unit are set utilizing 60 and 48 teeth to yield the 1.3:1 dispense ratio. The robot acquires adhesive from the KINEX 24 mixer. The hoses transferring adhesive or adhesive components are preferably thermally jacketed and the dispensing head is set to maintain the adhesive temperature at 95° F.

The robot dispenses about 5.8 cubic centimeters of the mixed two-component urethane adhesive on each hinge, and about 1.2 cubic centimeters on the mounting surface of the clevis. The robot positions the components on the glass surface in less than about 30 seconds from the time of dispense, and typically less than about 17 seconds. The robot then clamps the clevis in place for about 30 seconds, and similarly locates and holds the hinges on the desired location on the glass surface for about 30 seconds. Once the components have been set by the adhesive, the glass is then moved to the end of the production line. The assembly is then placed in a work in progress rack and packed in its shipping container shortly after bonding, e.g. about 7 minutes after bonding.

Bonds formed from the preferred embodiment adhesives described herein exceed bond strength OEM requirements set by most automotive companies and have been successfully tested in actual usage on vehicles. Bonds formed from the preferred embodiment adhesives

exhibit exceedingly high-strength against tensile, torque, and shear forces, such that bonded assemblies which have been immersed in a heated water bath for 500 hours can withstand a tensile force of over 795 psi without failure. This is explained in greater detail below in the discussion of experimental comparative testing that was conducted between the most preferred, commercially available two-component urethane adhesive and various single-component urethane adhesives that represent the state of the art for forming bonded automotive glass assemblies.

## EXPERIMENTAL TESTING

### Tensile Tests

Testing was performed to compare the bond strength of glass panel to metal attachment members made utilizing the preferred embodiment process with similar glass panel to metal attachments bonded utilizing several single-component urethane adhesives. Bond strength was measured after bonded assemblies, utilizing the various adhesives, were fully immersed in a water bath at 80° C for 100 or 500 hours. Samples comprised a glass window substrate having clevises adhesively bonded to the glass surface by the various adhesives. Each sample bonded with Essex adhesives utilized a layer of Essex 435.18 silane coupling agent deposited on the glass panel, and a layer of Essex 435.20a primer disposed on the layer of silane coupling agent. Each sample bonded with Morton Yokohama adhesives utilized Morton Yokohama MS-90 primer. In all samples, adhesive was deposited on the primer layer. The water bath consisted of a stainless steel tank fitted with an aeration system and filled with deionized water. The temperature of the bath was maintained at 80° C  $\pm$  2° C. As evaporation of the water occurred, the tank water level was restored by adding deionized water. Samples were completely immersed in an upright position in the water bath for the specified time period. The samples were adequately spaced from one another to allow water circulation between the assemblies. After immersion in the water bath for the

specified time period, the assemblies were removed and subjected to a tensile pull test. The assembly to be tested was placed in a stationary fixture such that the clevis to be pulled from the assembly was aligned with the pulling fixture. The pulling fixture was then attached to the clevis component, and additional adjustments were made with respect to the position of the pulling fixture to ensure that the pulling fixture exerted a tensile force on the bonded component perpendicular to the underlying glass substrate. Pulling was performed at a rate of 25.4 mm per minute until a peak tensile force was reached or failure occurred. The peak tensile force was recorded and, if failure occurred, the mode of failure was noted.

Table 1, as set forth below, summarizes the results of the tensile pull tests performed after immersion in the heated water bath. Metallic clevis components having a circular base with a surface area for bonding of 0.49 in<sup>2</sup> and bonded to the glass window substrate were subjected to the tensile pull test previously described. The Essex two-component adhesive, comprising Essex 73100 isocyanate component and Essex 73002 polyol component, is a most preferred adhesive in accordance with the present invention. The other compositions noted in Table 1 are representative of other types of adhesives to which the present invention provides a superior alternative over. Morton Yokohama WS-70FK is a urethane-based, isocyanate-rich, moisture-curable, single-component urethane prepolymer adhesive. Essex 57302 is a moisture-curable, single-component adhesive. Morton Yokohama WS-30 is a moisture-curable, single-component adhesive.

TABLE 1

Tensile Testing of Bonded Assemblies After Immersion in Water Bath at 80° C

Adhesive	Trial	Period of Immersion (hrs)	Peak Tensile Force (lbs/in <sup>2</sup> )	Failure %
Essex 73100 and 73002 Components	1	100	286*	0
	2	500	286*	0
	3	500	795*	0
	4	100	795*	0
	5	500	286*	0
Morton Yokohama WS-70FK	1	100	286*	0
	2	500	130	100
	3	500	338	100
	4	100	795*	0
	5	500	130	100
Essex 57302	1	100	286*	0
	2	500	207	100
	3	500	572	100
	4	100	795*	0
	5	500	207	100
Morton Yokohama WS-30	1	100	267	10
	2	500	85	100
	3	500	236	100
	4	100	745	10
	5	500	85	100

\*Test was stopped at the indicated peak tensile force value.

It is clear from a review of Table 1 that the adhesive according to the most preferred embodiment, i.e., Essex 73100 and 73002, provides significantly stronger bonds after immersion in the heated water bath than the conventional single-component adhesives tested. In trial 2, bonded assemblies formed using the adhesive of the most preferred embodiment, i.e., Essex 73100 and 73002 components, after 500 hours of water immersion, withstood a peak tensile force of 286 lbs/in<sup>2</sup> without any failures. In contrast, all bonded assemblies formed from the single-component urethane adhesives failed at significantly lower loads. Assemblies formed from the Morton Yokohama WS-70FK adhesive all failed, failure occurring at a peak value of only 130 lbs/in<sup>2</sup>. Assemblies formed from the Essex 57302

adhesive all failed, failure occurring at a peak value of only 207 lbs/in<sup>2</sup>. Assemblies formed from the Morton Yokohama WS-30 adhesive all failed, failure occurring at 85 lbs/in<sup>2</sup>.

Similarly, in trial 3, the results were even more striking. Bonded assemblies formed utilizing the most preferred embodiment adhesive withstood a peak tensile force of 795

5 lbs/in<sup>2</sup> without any failures. In contrast, bonded assemblies utilizing the other adhesives all failed, and failed at significantly lower values, i.e., 338, 572, and 236 lbs/in<sup>2</sup>.

It has surprisingly been found that bonds on glass surfaces formed from the preferred adhesives described herein are exceptionally strong and often exceed the material strength of the component or glass substrate. Components bonded to glass by the methods and adhesives described herein are able to withstand tensile forces of at least 500 psi, preferably 700 psi, and most preferably 795 psi without separation from the underlying glass surface. Such bond strength exceeds OEM tensile bond strength requirements set by most automobile manufacturers, which is typically 300 psi.

#### Torque Tests

15 Further testing was performed in which maximum torque values before failure were measured for bonded assemblies utilizing the same four adhesives employed in the previously described tensile testing. Each assembly utilized a clevis having a threaded fastener and a ½ inch diameter circular mounting base that was bonded by each of the previously described adhesives, to an appropriately primed glass surface ("appropriately primed" referring to use of the previously described primers, each with its particular adhesive). Two threaded nuts were placed on the threaded fastener portion of each bonded clevis. A torque wrench having a torque indication scale was then used to apply a torque to each bonded clevis until failure occurred. Fig. 9 illustrates maximum torque values for each of the adhesives tested. The clevis bonded with the most preferred, commercially available Essex 73100 and 73002



system withstood a significantly greater load, i.e., 107 inch-pounds, than did the other clevises bonded with Essex 57302, and Morton Yokohama WS-70FK and WS-30.

#### Vibration Tests

Additional testing was performed by subjecting a bonded vehicular window assembly to vibration of varying frequency and amplitude while concurrently subjecting the assembly to high and low temperatures. In this test, the bonded vehicular window assembly utilized was a window assembly produced for use as a side window in a Chrysler minivan. The assembly comprised two hinges and a clevis mount bonded to window glass by the adhesive of the most preferred embodiment, Essex 73100 and 73002. The glass of the window assembly weighed about 14.5 pounds, was tempered, had a compound curvature, and measured about 22.25 inches in height, 44 inches in length, and about 5 mm in thickness. The window assembly was formed in the same fashion as the previously described preferred embodiment bonded vehicular glass assembly designed for use in a Chrysler minivan, i.e. by robotic assembly. The two hinges and one clevis were attached to the concave surface of the glass panel. The window assembly was installed in a window fixture, or window buck. The bonded assembly was subjected to input vibration levels of +10 dB, +11 dB, and +12 dB, at varying frequencies, while concurrently being subjected to temperature cycling over a 12 hour period. Each vibration input profile consisted of sequentially administering nine different frequencies, namely 5, 10, 13, 17, 21, 23, 39, 72, and 1000 hertz, to the assembly being tested. The administration of each vibration input profile was repeated over the duration of the test.

In a first trial, the bonded assembly was subjected to the previously described vibration input profile at an amplitude of +10 dB for a period of 24 hours. During the first half of this trial, i.e., the first 12 hours, the temperature was varied in 2 hour increments at

362706-13198  
09213706-13198  
-30° C and 2 hours at 80° C until the 12 hours was completed. Thus, for instance the bonded assembly subjected to the vibration input profile of the nine different frequencies repeated over the duration of the test at an amplitude of +10 dB experienced a temperature of -30° C for 2 hours, then a temperature of 80° C for 2 hours, then a temperature of -30° C for another 2 hours, then a temperature of 80° C for 2 hours, then a temperature of -30° C for another 2 hours, and lastly, a temperature of 80° C for 2 hours. The bonded assembly passed this first trial of the test without failure.

After being subjected to the previously described conditions, the bonded assembly was then further subjected to a second 12 hour trial utilizing the same vibration frequency and amplitude input profile as noted above, but even more severe temperature extremes. The second 12 hour temperature cycle for the +10 dB level consisted of repeated exposure in 2 hour increments to temperatures of -40° C and 100° C until the 12 hours was completed. This assembly passed this portion of the test without failure.

The assembly was then subject to a second trial, utilizing the same vibration frequency and temperature conditions as the first trial for the same time period of 24 hours. Instead of a vibration amplitude of +10 dB, an amplitude of +11 dB was utilized. The assembly passed this portion of the test without failure.

In a third trial, the bonded assembly comprising the most preferred embodiment adhesive was subjected to the previously described vibration input profile at an amplitude of +12 dB. Temperature cycling was performed by repeated exposure to temperatures of -40° C and 100° C for 2 hour periods as described before for a total time of 24 hours. The assembly passed this test without failure.

In another vibration test, a window assembly produced for use as a side window in a Chrysler minivan utilizing Essex 73100 and 73002 adhesive components, was subjected to a vibration frequency of 10-50 hertz at +8 dB for 20 hours while the temperature was varied

from -30° C to 80° C. The bonded assembly did not fail. In another vibration test, a similar bonded assembly utilizing Essex 73100 and 73002 components, was subjected to a vibration frequency of 10-50 hertz at +9 dB for 20 hours. The bonded assembly was exposed to temperatures of -40° C and 100° C. The bonded assembly did not fail. In yet another vibration test, a similar bonded assembly utilizing Essex 73100 and 73002 components was subjected to a vibration frequency of 10-50 hertz at +10 dB for 20 hours. During vibration testing, the bonded assembly was subjected to temperatures of -40° C and 100° C. The bonded assembly did not fail.

In yet another vibration test, bonded assemblies were vibrated at room temperature, that is about 20° C, for an extended period of time. Each assembly consisted of a clevis having a ½ inch diameter circular mounting base bonded to an appropriately primed 2 inches x 5 inches glass substrate, with either Essex 57100 and 57002 adhesive or Essex 57302 adhesive. After formation of the bonded assemblies, they were aged for a period of 5 weeks while subjected to thermal cycling in accordance with Ford Motor Co. testing specification ESB-M11P33-A Section 3.2.8.

Vibration testing was performed by inducing a vibratory motion to the glass substrate, at frequency of 13 hertz and an amplitude of 0.20 inch, while an 18 pound load was applied to the clevis. The bonded assembly was oriented in a vertical position, i.e., glass substrate in a vertical position, and the 18 pound weight suspended from the clevis bonded to the glass. While in this configuration, the bonded assembly was subjected to the previously noted vibration conditions. Testing was conducted until failure occurred or until at least 100,000 cycles were completed. Table 2 set forth below, illustrates the superior performance of the Essex 57100 and 57002 system over the Essex 57302 system. All but one bonded sample utilizing the most preferred embodiment adhesive successfully withstood over 100,000 vibration cycles before the test was stopped. The bonded assemblies

employing the Essex 57302 single component, moisture-curable adhesive all failed before reaching 30,000 cycles. The failure observed was cohesive failure of the adhesive material itself, that is no failure at the bond interface, but instead occurring within the adhesive material.

TABLE 2

Vibration Testing at Room Temperature\*  
Aged Samples -

Sample #	Essex 57100 and 57002 Components		Essex 57302	
	No. Cycles	Failure	No. Cycles	Failure
1	> 101,000	NF	1,800	coh
2	> 111,000	NF	14,500	coh
3	66,000	coh	10,500	coh
4	> 100,000	NF	29,500	coh
5	> 100,000	NF	27,800	coh
6	> 100,100	NF	21,500	coh

\*Test conditions: load: 18 lbs; frequency: 13 Hz; shearing mode on 2x5 glass plaques; NF=No Failure; coh=Cohesive Failure, i.e., failure occurring in adhesive material.

In another vibration test, similar in all respects to the previously described testing summarized in Table 2, bonded assemblies were subjected to testing at 80° C. Testing was conducted until failure occurred or until at least 100,000 cycles were completed. Table 3 set forth below illustrates the remarkable performance of the most preferred embodiment adhesive under high temperature conditions. Only one sample failed, the remaining five successfully withstanding over 100,000 cycles. In contrast, the bonded assemblies utilizing the Essex 57302 adhesive all failed (cohesive failure of the adhesive material) before reaching 21,000 cycles.

TABLE 3

Vibration Testing at 80° C\*  
Aged Samples -

Sample #	Essex 57100 and 57002 Components		Essex 57302	
	# Cycles x 10 <sup>3</sup>	Failure	# Cycles x 10 <sup>3</sup>	Failure
1	> 100,000	NF	20,600	coh
2	> 101,000	NF	13,100	coh
3	15,000	coh	20,600	coh
4	> 101,000	NF	7,500	coh
5	> 104,000	NF	19,000	coh
6	> 104,000	NF	5,700	coh

\*Test conditions: load: 18 lbs; frequency: 13 Hz; shearing mode on 2x5 glass plaques; NF=No Failure; coh=Cohesive Failure, i.e., failure occurring in adhesive material.

Environmental Exposure Tests

Further testing was performed to compare the bond strength of glass to metal bonds formed by the preferred embodiment process, with similar glass and metal assemblies bonded utilizing the single-component urethane adhesives described in the first series of tests, after exposure to various environmental conditions. In all the tests described below, bonded samples were prepared and tests performed as in the previously described tensile pull tests.

Heat age tests were performed by placing samples to be tested in a forced air heating chamber having means for controlling the temperature within +/- 2° C. The bonded assemblies, formed from the same adhesives listed in Table 1, were aged for periods of 168 or 336 hours at 80° C. After aging, the bonded assemblies were subjected to tensile testing. In all instances the adhesive according to the most preferred embodiment, i.e., Essex 73100 and 73002, performed at least as well as or better than the other single-component urethanes.

Humidity adhesion testing was performed in which bonded assemblies, formed from the same adhesives listed in Table 1, were placed in a chamber at 38° C with an atmosphere having a relative humidity of 95% to 100% for various periods of time. Testing was performed in accordance with Chrysler test specification LP 463PB-9-01. In all instances the adhesive according to the most preferred embodiment, i.e., Essex 73100 and 73002, performed at least as well as or better than the single-component urethanes. The most preferred embodiment adhesive generally performed better than both Morton Yokohama adhesives, WS-70FK and WS-30, in that it exhibited a lower failure rate.

Environmental cycling tests were performed by exposing the bonded samples to five repeated cycles of 16 hours at 80° C, 24 hours at 38° C and relative humidity of 98% to 100%, and 8 hours at -29° C. The tests were performed in accordance with Chrysler testing specification LP 435CB-10-01. In all instances the adhesive according to the most preferred embodiment, i.e., Essex 73100 and 73002, performed as well as or better than the conventional single-component urethanes.

Additional testing was performed in which bonded assemblies utilizing Essex 73100 and 73002, Morton Yokohama WS-70FK, Essex 57302, and Morton Yokohama WS-30 were exposed to a temperature of -30° C for 192 hours. Resistance to acetic acid, salt spray, and windshield washer solvent were also tested. In all instances, assemblies formed according to the preferred process described herein and utilizing the Essex 73100 and 73002 components, performed at least as well as or better than assemblies utilizing the conventional adhesives, 57302, WS-70FK, and WS-30.

#### Stress Tests

Stress testing of bonded assemblies was performed upon bonded assemblies, each utilizing one of the four previously described adhesives, i.e. Essex 73100 and 73002, Morton Yokohama WS-70FK, Essex 57302, and Morton Yokohama WS-30, to bond clevis

attachments to appropriately primed, untempered glass surfaces. After sufficient curing of each assembly, the bonded assembly was visually examined for stress as follows. Each bonded assembly was positioned adjacent a source of polarized light, and light directed toward the area of glass having the cured adhesive deposited thereon. The region of untempered glass surrounding the cured adhesive was visually examined by use of a polarization filter. Stress imparted to the glass would be indicated by stress lines appearing in the glass, which are observable by use of the polarization filter. Bonded assemblies utilizing Morton Yokohama adhesives and the Essex 57302 adhesive exhibited relatively large amounts of stress imparted to the glass. Surprisingly, the bonded assembly utilizing two-component Essex adhesive 73100 and 73002 displayed virtually no stress imparted to the glass.

#### Shear vs. Cure Time

In another series of tests, lateral shear values were measured for two bonded assemblies over the curing period of each adhesive utilized in each assembly. Fig. 10 is a graph of lateral shear values just prior to failure of bonds formed between plastic and glass, utilizing the Essex 73100 and 73002 two-component system. That graph illustrates that bonds capable of withstanding 300 psi shear, result after only 15 minutes of curing. Bonds capable of withstanding over 1000 psi shear forces result in only about 30 minutes of total cure time. As previously noted, these cure times can be accelerated by the addition of heat or chemical agents. This is remarkable and when applied in a high rate manufacturing process, is of significant commercial value. In contrast, bonds formed utilizing conventional single-component urethanes require much longer cure times. Fig. 11 illustrates shear values just prior to failure versus cure time of the Essex 57302 single-component system. In order to obtain a bond from that single-component urethane capable of bearing a shear force of 300 psi, curing must be allowed to occur for 5 hours, which is 20 times longer than the

previously described Essex 73100 and 73002 two-component system. In order to obtain a bond capable of withstanding a shear force of 1000 psi, curing of the single-component urethane must be allowed to occur for 72 hours, which is 144 times longer than the previously described 73100 and 73002 two-component system.

5

#### Road Tests

The previously described window assemblies produced for Chrysler and utilizing the Essex 73100 and 73002 two-component system for bonding various attachment members to the glass panels of the assemblies, were installed as side windows in Chrysler minivans. The vehicles were then subjected to a battery of road tests and accelerated environmental performance tests by Chrysler. Installed window assemblies successfully passed Chrysler testing.

The preferred embodiment bonded assemblies and panel assemblies described herein may be incorporated in vehicles such as automobiles, trucks, vans, minivans, and utility vehicles; recreational vehicles such as motor homes, campers, and trailers; other vehicles such as buses, trolleys, trains, commuter vehicles, and airplanes; marine vehicles such as boats and other watercraft; and nearly any structure utilizing a glass panel or substrate for which there exists a need to securely adhere other components to, or to securely affix one or more glass panels thereto. Such window panel assemblies are especially useful in a variety of vehicles and especially for large area windows, and particularly for large area flush-mounted glazings, such as are used as front, rear, and side windows, and as sunroofs, in automobiles, minivans, vans, trucks, and buses and which utilize a window panel that weighs at least about 3 kilograms (with a window panel weight of at least 5 kilograms common for front and rear windows, and for side windows on minivans and larger vehicles) and with a window panel area of at least about 250 square inches.



It is contemplated that the adhesives described herein could be used to form an architectural window assembly comprising a frame containing one or more glass panels bonded to the frame by an effective amount of the adhesive, as described herein. In the preferred embodiment, the frame is formed from steel or other comparable metal. The frame may contain a plurality of glass panels to form a multi-pane architectural window. Each glass panel is bonded to the frame by an effective amount of adhesive, which preferably is the rapid set, rapid cure, two-component urethane adhesives described herein. Alternatively, or in addition, each glass panel may be bonded to a mounting rail disposed on the frame or other substrate by a layer of adhesive. It is further contemplated that the adhesives described herein could be utilized to form an architectural window assembly that does not require a frame. In this embodiment, two or more glass panels are separated by a spacer member disposed between the panels and generally along the perimeter of the panels. An effective amount of the previously described adhesive is used to bond each panel to the spacer to form the window assembly. In these architectural window assemblies, it is preferred that all condensable gases, e.g., water vapor, in the region between the panels are evacuated, or one or more inert gases injected therein to displace such gases, so that condensation does not occur in that region.

It is contemplated that the bonded assemblies described herein will find widespread application in vehicle window assemblies; architectural and residential window assemblies; home and industrial appliances including, but not limited to, washing machines, dryers, ovens, stoves, and refrigerators; and in furniture utilizing bonded glass construction.

Of course, it is understood that the foregoing are merely preferred embodiments of the invention and that various changes and alterations can be made without departing from the spirit and broader aspects thereof as set forth in the appended claims, which are to be interpreted in accordance with the principals of patent law including the Doctrine of

5      Equivalents.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A vehicular window assembly suitable for use in a vehicle, said window assembly comprising:

a glass panel;

an attachment member; and

5 a layer of a rapid set, rapid cure, two-component urethane adhesive disposed between said glass panel and said attachment member, said layer of adhesive cured to form a joint suitable for use on a vehicle.

2. The vehicular window assembly of claim 1 wherein said adhesive comprises an isocyanate component and a polyol component, and said rapid set characteristic is such that after mixing said isocyanate component and said polyol component, and after relatively promptly contacting said glass panel to said attachment member, said glass panel and said

5 attachment member are held by said adhesive against movement resulting from weight of said panel and said attachment member, and held by said adhesive against movement resulting from application of a relatively slight force, within a time period of about 3 minutes or less from the time of mixing and application of said adhesive to said panel and said attachment member.

3. The vehicular window assembly of claim 2 wherein said time period is about 90 seconds or less.

4. The vehicular window assembly of claim 3 wherein said time period is about 45 /seconds or less.

5. The vehicular window assembly of claim 1 wherein said rapid cure characteristic is such that said adhesive cures in a time period of less than about 60 minutes.

6. The vehicular window assembly of claim 5 wherein said rapid cure characteristic is such that said adhesive cures in a time period of less than about 50 minutes.

7. The vehicular window assembly of claim 6 wherein said rapid cure characteristic is such that said adhesive cures in a time period of less than about 40 minutes.

8. The vehicular window assembly of claim 1 wherein said rapid cure characteristic is such that at least about 80% of the physical characteristics of the cured adhesive are obtained within about 60 minutes from the time of adhesive set.

9. The vehicular window assembly of claim 1 further comprising:  
a layer of at least one of an adhesive promoter and a primer disposed between said glass panel and said layer of adhesive.

10. The vehicular window assembly of claim 9 wherein said at least one of said adhesion promoter and said primer is selected from the group consisting of silane compounds, titanium coupling agents, zirconium coupling agents, and moisture-curable urethane prepolymers.

11. The vehicular window assembly of claim 10 wherein the thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.01 mils to about 3.5 mils.

12. The vehicular window assembly of claim 11 wherein the thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.05 mils to about 2 mils.

13. The vehicular window assembly of claim 12 wherein the thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.1 mils to about 1.0 mils.

14. The vehicular window assembly of claim 1 further comprising:  
a glass frit layer disposed on said glass panel.

15. The vehicular window assembly of claim 1 wherein the thickness of said adhesive disposed between said attachment member and said glass panel is from about 0.01 mm to about 4.0 mm.

16. The vehicular window assembly of claim 15 wherein the thickness of said adhesive is from about 0.25 mm to about 2.0 mm.

17. The vehicular window assembly of claim 16 wherein the thickness of said adhesive is from about 0.5 mm to about 1.0 mm.

18. A bonded vehicular assembly suitable for use in a vehicle, said assembly comprising:  
a glass substrate;

an attachment member comprising a material selected from the group consisting of  
metal, plastic, and combinations thereof; and

5 a layer of a rapid set, rapid cure, two-component urethane adhesive disposed between  
and bonding said glass substrate and said attachment member, wherein upon curing of said  
adhesive, a joint suitable for use on a vehicle is formed.

19. The bonded vehicular assembly of claim 18 wherein said adhesive comprises:

an isocyanate component; and

a polyol component.

20. The bonded vehicular assembly of claim 19 wherein said polyol component includes  
a high amine density plural amine in an amount of from about 2% to about 20% by weight  
of said polyol component.

21. The bonded vehicular assembly of claim 19 wherein said adhesive further comprises:

at least one filler agent in at least one of said isocyanate component and said polyol  
component, wherein said filler agent is in an amount of from about 15% to about 50% of the  
total weight of said polyol and isocyanate components.

22. The bonded vehicular assembly of claim 21 wherein said filler agent is in an amount  
of from about 20% to about 30% of the total weight of said polyol and said isocyanate  
components.

23. The bonded vehicular assembly of claim 21 wherein said filler agent is selected from the group consisting of silicates, silica, calcium carbonate, talc, and combinations thereof.

24. The bonded vehicular assembly of claim 19 wherein said isocyanate component comprises compounds with isocyanate functionality and said polyol component comprises compounds with hydroxy and/or amino functionality, and wherein the ratio of isocyanate functionality to hydroxy and amino functionality is from about 0.9 to about 2.0.

25. The bonded vehicular assembly of claim 24 wherein said ratio of isocyanate functionality to hydroxy and amine functionality is from about 1.03 to about 1.4.

26. The bonded vehicular assembly of claim 25 wherein said ratio of isocyanate functionality to hydroxy and amino functionality is from about 1.1 to about 1.3.

27. The bonded vehicular assembly of claim 20 wherein said high amine density plural amine is a compound having an amine to carbon ratio of from about 1.0 to about 0.25:1, wherein (i) the compound contains at least 3 amine groups except if said compound is aromatic then said compound contains at least 2 amine groups, and (ii) the compound contains from 2 to 24 carbon atoms.

28. The bonded vehicular assembly of claim 27 wherein said high amine density plural amine has a molecular weight of from about 115 to about 5000.

29. The bonded vehicular assembly of claim 28 wherein said high amine density plural amine has a molecular weight of from about 210 to about 290.

30. The bonded vehicular assembly of claim 27 wherein said high amine density plural amine comprises a reaction product of (i) at least one of pentaerythritol, glucose, and sucrose, and (ii) at least one member selected from the group consisting of ammonia and amino alkanes of the formula  $C_xH_nNH_2$ , wherein x ranges from 1 to 20 and n is such that the alkane is saturated.

31. The bonded vehicular assembly of claim 30 wherein x ranges from about 1 to about 6.

32. The bonded vehicular assembly of claim 31 wherein x ranges from about 1 to about 3.

33. The bonded vehicular assembly of claim 27 wherein said high amine density plural amine compound has from 11 to 12 carbon atoms.

34. The bonded vehicular assembly of claim 18 further comprising a layer of at least one of an adhesion promoter and a primer disposed between said glass substrate and said layer of adhesive.

35. The bonded vehicular assembly of claim 34 wherein said at least one of said adhesion promoter and said primer is selected from the group consisting of silane compounds, titanium coupling agents, zirconium coupling agents, and moisture-curable urethane prepolymers.

36. The bonded vehicular window assembly of claim 35 wherein said assembly is a movable vehicular window assembly.



09213706-12498

37. The movable window assembly of claim 36 wherein said assembly further comprises:  
a glass frit layer disposed on said glass substrate.

38. The movable window assembly of claim 36 wherein said assembly further comprises:  
at least one hinge bonded to said glass substrate.

39. The movable window assembly of claim 38 wherein said hinge comprises a first  
portion and a second portion that is movable with respect to said first portion, and wherein  
said first portion is bonded to said glass substrate by an effective amount of said adhesive  
disposed between and contacting said first portion and said glass substrate.

40. The movable window assembly of claim 39 wherein said second portion of said hinge  
is affixed to a vehicular mounting surface.

41. A vehicular panel assembly suitable for use in a vehicle, said assembly comprising:  
a glass substrate;

at least one attachment member affixed to said glass member; and

a layer of a two-component urethane adhesive disposed between and affixing said at  
least one attachment member to said glass substrate, said layer of adhesive cured to form a

5 joint suitable for use on a vehicle, wherein said adhesive comprises an isocyanate component  
and a polyol component.

42. The vehicular panel assembly of claim 41 wherein said isocyanate component comprises compounds with isocyanate functionality and said polyol component comprises a high amine density plural amine compound and compounds with hydroxyl and/or amino functionality, wherein the ratio of isocyanate functionality to hydroxy and/or amino functionality is from about 1.03 to about 1.4.

43. The vehicular panel assembly of claim 42 wherein said high amine density plural amine compound is in an amount of from about 2% to about 20% by weight of said polyol component.

44. The vehicular panel assembly of claim 41 wherein said adhesive further comprises at least one filler agent in at least one of said isocyanate component and said polyol component, in an amount of from about 15% to about 50% of the total weight of said polyol component and said isocyanate component.

45. The vehicular panel assembly of claim 41 further comprising a layer of at least one of an adhesion promoter and a primer disposed between said glass substrate and said layer of adhesive.

46. The vehicular panel assembly of claim 45 wherein said at least one of said adhesion promoter and said primer is selected from the group consisting of silane compounds, titanium coupling agents, zirconium coupling agents, and moisture-curable urethane prepolymers.

47. A method of adhering an attachment member to a glass surface, said method comprising:

providing a substrate having a glass surface;

providing an attachment member to be adhered to said glass surface, said attachment member having a mounting surface;

5 providing a rapid set, rapid cure, two-component urethane adhesive;

depositing an effective amount of said adhesive on at least one of said attachment member mounting surface and said glass surface;

10 positioning said attachment member and said substrate such that said adhesive is disposed between and contacting said attachment member and at least a portion of said glass surface of said substrate; and

curing said adhesive.

48. The method of claim 47 wherein said adhesive comprises an isocyanate component and a polyol component including a high amine density plural amine compound, and wherein said method further comprises, prior to said depositing said adhesive, a step of:

mixing said isocyanate component and said polyol component.

49. The method of claim 48 wherein said high amine density plural amine compound is in an amount of from about 2% to about 20% by weight of said polyol component and said adhesive further comprises at least one filler agent in at least one of said isocyanate component and said polyol component, wherein said filler agent is in an amount of from  
5 about 15% to about 50% of the total weight of said polyol and isocyanate components.

50. The method of claim 49 wherein said filler agent is in an amount of from about 20% to about 30% of the total weight of said polyol and said isocyanate components.

51. The method of claim 49 wherein said filler agent is selected from the group consisting of silicates, silica, calcium carbonate, talc, and combinations thereof.

52. The method of claim 48 wherein said isocyanate component comprises compounds with isocyanate functionality and said polyol component comprises compounds with hydroxy and/or amino functionality, and wherein the ratio of isocyanate functionality to hydroxy and amino functionality is from about 0.9 to about 2.0.

53. The method of claim 52 wherein said ratio of isocyanate functionality to hydroxy and amine functionality is from about 1.03 to about 1.4.

54. The method of claim 53 wherein said ratio of isocyanate functionality to hydroxy and amino functionality is from about 1.1 to about 1.3.

55. The method of claim 48 wherein said high amine density plural amine compound is a compound having an amine to carbon ratio of from about 1.0 to about 0.25:1 with the proviso that (i) the compound contains at least 3 amine groups except if said compound is aromatic then said compound contains at least 2 amine groups, and (ii) the compound contains from 2 to 24 carbon atoms.

56. The method of claim 55 wherein said high amine density plural amine compound has a molecular weight of from about 115 to about 5000.

57. The method of claim 56 wherein said high amine density plural amine compound has a molecular weight of from about 210 to about 290.

58. The method of claim 48 wherein said high amine density plural amine comprises a reaction product of (i) at least one of pentaerythritol, glucose, and sucrose, and (ii) at least one member selected from the group consisting of ammonia and amino alkanes of the formula  $C_xH_nNH_2$ , where x ranges from 1 to 20 and n is such that the alkane is saturated.

59. The method of claim 58 wherein x ranges from about 1 to about 6.

60. The method of claim 47 further comprising, prior to depositing said adhesive, a step of:

depositing a layer of at least one of an adhesion promoter and a primer to at least one of said glass surface and said attachment member mounting surface.

61. The method of claim 47 wherein the thickness of said adhesive disposed between said attachment member and at least a portion of said glass surface is from about 0.01 mm to about 4.0 mm.

62. The method of claim 61 wherein the thickness of said adhesive is from about 0.25 mm to about 2.0 mm.

63. The method of claim 62 wherein the thickness of said adhesive is from about 0.5 mm to about 1.0 mm.

64. The method of claim 47 wherein said depositing step is performed by robotic deposition.

65. The method of claim 47 wherein said depositing step is performed by utilizing a dispense metering unit and a mixing unit.

66. The method of claim 65 wherein said mixing unit is a static mix tube in association with a sequential reverse static mixer.

67. The method of claim 65 wherein said providing a rapid set, rapid cure, two-component urethane adhesive is performed by delivering said adhesive through thermally controlled lines to said dispense metering unit.

68. The method of claim 47 wherein said curing step is accelerated by heating said adhesive.

69. The method of claim 68 wherein said heating is performed by a method selected from the group consisting of induction curing, infra red heating, and combinations thereof.

70. A method of adhering an attachment member to a glass substrate, said method comprising:

providing a glass substrate;

providing an attachment member to be adhered to said glass substrate, said attachment member having a mounting surface;

providing a rapid set, rapid cure, two-component urethane adhesive;

forming a frit layer on said glass substrate;

depositing an effective amount of said adhesive on at least one of said attachment member mounting surface and said frit layer;

positioning said attachment member and said substrate such that said adhesive is disposed between and contacting said attachment member and at least a portion of said frit layer formed on said substrate; and

curing said adhesive.

71. A moveable vehicular window assembly comprising:

a glass panel comprising a layer of frit disposed on at least one of its surfaces;

an attachment member comprising a material selected from the group consisting of metal, plastic, and combinations thereof; and

a layer of a rapid set, rapid cure, two-component urethane adhesive disposed between said layer of frit and said attachment member, wherein said adhesive comprises an isocyanate component and a polyol component, said layer of adhesive cured to form a joint suitable for use on a vehicle.

72. The movable vehicular window assembly of claim 71 wherein said rapid set characteristic is such that after mixing said isocyanate component and said polyol component, and after relatively promptly contacting said glass panel to said attachment member, said glass panel and said attachment member are held by said adhesive against movement resulting from weight of said panel and said attachment member, and held by said adhesive against movement resulting from application of a relatively slight force, within a time period of about 3 minutes or less from the time of mixing and application of said adhesive to said panel and said attachment member.

73. The movable vehicular window assembly of claim 72 wherein said time period is about 90 seconds or less.

74. The movable vehicular window assembly of claim 73 wherein said time period is about 45 seconds or less.

75. The movable vehicular window assembly of claim 71 wherein said rapid cure characteristic is such that said adhesive cures in a time period of less than about 60 minutes.

76. The movable vehicular window assembly of claim 75 wherein said rapid cure characteristic is such that said adhesive cures in a time period of less than about 50 minutes.

77. The movable vehicular window assembly of claim 76 wherein said rapid cure characteristic is such that said adhesive cures in a time period of less than about 40 minutes.

78. The moveable vehicular window assembly of claim 71 wherein said attachment member is selected from the group consisting of mounting components, hinges, clevises, latches, lift brackets, division bars, guide tracks, handles, guide pins, strut-mounting hardware, strikers, brake lights, power-mounting hardware, rails, gaskets, antennas, wiper mounts, cosmetic articles, and rearview mirrors.

79. The movable vehicular window assembly of claim 71 wherein said movable vehicular window assembly is adapted to be a window assembly selected from the group consisting of a hinged window assembly, a sunroof, a door lift window, a liftgate, and a sliding window assembly.



09213706-121793

80. The movable vehicular window assembly of claim 71 further comprising:  
a layer of at least one of an adhesive promoter and a primer disposed between said glass panel and said layer of adhesive.

81. The movable vehicular window assembly of claim 80 wherein said at least one of said adhesion promoter and said primer is selected from the group consisting of silane compounds, titanium coupling agents, zirconium coupling agents, and moisture-curable urethane prepolymers.

82. The movable vehicular window assembly of claim 81 wherein the thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.01 mils to about 3.5 mils.

83. The movable vehicular window assembly of claim 82 wherein the thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.05 mils to about 2 mils.

5 84. The movable vehicular window assembly of claim 83 wherein the thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.1 mils to about 1.0 mils.

85. The movable vehicular window assembly of claim 71 wherein the thickness of said adhesive disposed between said attachment member and said glass panel is from about 0.01 mm to about 4.0 mm.

86. The movable vehicular window assembly of claim 85 wherein the thickness of said adhesive is from about 0.25 mm to about 2.0 mm.

87. The movable vehicular window assembly of claim 86 wherein the thickness of said adhesive is from about 0.5 mm to about 1.0 mm.

5 88. A window assembly suitable for use in a vehicle, said assembly comprising:  
a glass panel;  
an attachment member adapted for attachment to said glass panel; and  
a layer of a rapid set, rapid cure, two-component urethane adhesive disposed between  
said glass panel and said attachment member, wherein said adhesive comprises an isocyanate  
10 component and a polyol component, and wherein said adhesive is capable, upon curing, to  
form a bond that can withstand a tensile force of at least 5 lbs/in<sup>2</sup>.

89. A hinged vehicular window assembly for a vehicle suitable for use in a vehicle, said  
assembly comprising:

a glass panel having a layer of glass frit disposed on at least a portion of one of its  
surfaces;

5 a hinged mounting member having a first portion bonded to said glass panel by an  
effective amount of a rapid set, rapid cure, two-component urethane adhesive disposed  
between said glass panel and said first portion, said adhesive cured to form a joint suitable  
for use on a vehicle, said hinged mounting member further having a second portion adapted  
for affixment to a mounting surface.

90. The hinged assembly of claim 89 wherein said adhesive comprises:

an isocyanate component; and

a polyol component including a high amine density plural amine in an amount of from about 2% to about 20% by weight of said polyol component.

91. The hinged assembly of claim 90 wherein said high amine density plural amine is in a concentration of from about 5% to about 10% by weight of said polyol component.

92. The hinged assembly of claim 90 wherein said isocyanate component comprises compounds with isocyanate functionality and said polyol component comprises compounds with hydroxy and/or amino functionality, and wherein the ratio of isocyanate functionality to hydroxy and amino functionality is from about 0.9 to about 2.0.

93. The hinged assembly of claim 92 wherein said ratio of isocyanate functionality to said hydroxy and amino functionality is from about 1.03 to about 1.4.

94. The hinged assembly of claim 93 wherein said ratio of isocyanate functionality to said hydroxy and amino functionality is from about 1.1 to about 1.3.

95. The hinged assembly of claim 90 wherein said adhesive further comprises at least one filler agent in at least one of said isocyanate component and said polyol component, wherein said filler agent is in an amount of from about 15% to about 50% of the total weight of said polyol and isocyanate components.

96. The hinged assembly of claim 95 wherein said filler agent is in an amount of from about 20% to about 30% of the total weight of said polyol and said isocyanate components.

97. The hinged assembly of claim 96 wherein said filler agent is in an amount of about 25% of the total weight of said polyol and said isocyanate components.

98. The hinged assembly of claim 95 wherein said filler agent is selected from the group consisting of silicates, silica, calcium carbonate, talc, and combinations thereof.

99. The hinged assembly of claim 89 further comprising:  
a layer of at least one of an adhesion promoter and a primer disposed between said glass panel and said adhesive.

100. The hinged assembly of claim 99 wherein said adhesion promoter and said primer are selected from the group consisting of silane compounds, titanium coupling agents, zirconium coupling agents, and moisture-curable urethane prepolymers.

101. The hinged assembly of claim 100 wherein said layer of at least one of said adhesion promoter and said primer has a thickness of from about 0.01 mils to about 3.5 mils.

102. The hinged assembly of claim 101 wherein said thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.05 mils to about 2 mils.

103. The hinged assembly of claim 102 wherein said thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.1 mils to about 1.0 mils.

104. The hinged assembly of claim 89 wherein said hinged mounting member is formed from a material selected from the group consisting of metal, plastic, and combinations thereof.

105. The hinged assembly of claim 104 wherein said hinged mounting member bonded to said glass panel is able to withstand a tensile force of at least 500 psi exerted perpendicular to said plane of said glass panel without failure of said adhesive.

106. The hinged assembly of claim 89 wherein said adhesive has a thickness of from about 0.01 mm to about 4.0 mm.

107. The hinged assembly of claim 106 wherein said adhesive has a thickness of from about 0.25 mm to about 2.0 mm.

108. The hinged assembly of claim 107 wherein said adhesive has a thickness of from about 0.5 mm to about 1.0 mm.

109. The hinged assembly of claim 89 wherein said second portion of said hinged mounting member is affixed to a mounting surface of a vehicle selected from the group consisting of automobiles, trucks, vans, minivans, utility vehicles, motor homes, campers, trailers, buses, trolleys, trains, commuter vehicles, airplanes and boats.

110. A movable window assembly for a vehicle suitable for use in a vehicle, said assembly comprising:

a glass panel; and

an attachment member bonded to said glass panel by an effective amount of an adhesive disposed between said mounting member and said glass panel, said adhesive comprising an isocyanate component and a polyol component.

111. The movable window assembly of claim 110 wherein said attachment member is selected from the group consisting of mounting components, hinges, clevises, latches, lift brackets, division bars, guide tracks, handles, guide pins, strut-mounting hardware, strikers, brake lights, power-mounting hardware, rails, gaskets, antennas, wiper mounts, cosmetic articles and rearview mirrors.

112. The movable window assembly of claim 110 wherein said assembly is selected from the group consisting of hinged window assemblies, sunroofs, door lift windows, liftgates, and sliding window assemblies.

113. The movable window assembly of claim 110 wherein said adhesive disposed between and bonding said attachment member to said glass panel forms a layer having a thickness of from about 0.01 mm to about 4.0 mm.

114. The movable window assembly of claim 113 wherein said layer of adhesive has a thickness of from about 0.25 mm to about 2.0 mm.

115. The movable window assembly of claim 114 wherein said layer of adhesive has a thickness of from about 0.5 mm to about 1.0 mm.

116. The movable window assembly of claim 110 further comprising:

a layer of at least one of an adhesion promoter and a primer disposed between said glass panel and said adhesive.

117. The movable window assembly of claim 116 wherein said adhesion promoter and said primer are selected from the group consisting of silane compounds, titanium coupling agents, zirconium coupling agents, and moisture-curable urethane prepolymers.

118. The movable window assembly of claim 117 wherein said layer of at least one of said adhesion promoter and said primer has a thickness of from about 0.01 mils to about 3.5 mils.

119. The movable window assembly of claim 118 wherein said thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.05 mils to about 2 mils.

120. The movable window assembly of claim 119 wherein said thickness of said layer of at least one of said adhesion promoter and said primer is from about 0.1 mils to about 1.0 mils.

121. The movable window assembly of claim 110 wherein said glass panel is selected from the group consisting of opaque or coated glass, privacy glass, glass having a layer of frit, tinted glass, solar tinted glass, multi-composite glass laminates, and combinations thereof.

122 The movable window assembly of claim 110 wherein said assembly further comprises:

a frit layer disposed on said glass panel.

123. A positionable sunroof adapted and suitable for use in a vehicle, said sunroof comprising:

a glass panel;

at least one hinge component having a first portion affixed to said glass panel and a  
5 second portion being adapted for attachment to a vehicle mounting surface; and

a layer of a rapid set, rapid cure, two-component urethane adhesive disposed between  
a portion of said glass panel and said first portion of said hinge component, wherein said  
adhesive is cured thereby affixing said first portion of said hinge component to said glass  
panel.

124. A movable door lift window assembly adapted and suitable for use in a vehicle, said  
door lift window assembly comprising:

a glass panel;

at least one lift bracket bonded to said glass panel by an effective amount of a rapid  
5 set, rapid cure, two-component urethane adhesive disposed between said glass panel and said  
at least one lift bracket.



125. A liftgate window assembly adapted and suitable for use in a vehicle, said liftgate comprising:

a glass panel; and

at least one hinge having a first member affixed to said glass panel by a layer of a rapid set, rapid cure, two-component adhesive disposed between a portion of said glass panel and said first member, said hinge further having a second member positionably movable with respect to said first member and adapted for attachment to a vehicle.

126. A sliding window assembly adapted and suitable for use in a vehicle, said assembly comprising:

a first glass panel;

at least one guide track bonded to an edge of said first glass panel by an effective amount of a rapid set, rapid cure, two-component urethane adhesive, said guide track having a channel configured to slidably receive a glass panel; and

a second glass panel slidably disposed in said channel of said guide track.

127. The sliding window assembly of claim 126 wherein said first glass panel has a pin component bonded to it by an effective amount of said adhesive, and said second glass panel has a latch component bonded to it by an effective amount of said adhesive, wherein said latch component is adapted to releasably engage said pin component.

128. The sliding window assembly of claim 126 further comprising a third glass panel.

129. The sliding window assembly of claim 128 wherein said at least one guide track is bonded to an edge of said third glass panel by an effective amount of said adhesive.

130. The sliding window assembly of claim 129 wherein said at least one guide track comprises:

an upper guide track bonded by an effective amount of said adhesive to an upper edge of said first glass panel and said third glass panel; and

5 a lower guide track bonded by an effective amount of said adhesive to a lower edge of said first glass panel and said third glass panel.

0921706 13198  
862727 9021260

**BONDED VEHICULAR GLASS ASSEMBLIES UTILIZING TWO-COMPONENT**  
**URETHANES, AND RELATED METHODS OF BONDING**

**ABSTRACT**

Bonded vehicular glass assemblies utilizing two-component urethane adhesives to  
5 attach dynamic load-bearing attachment members to glass substrates to form a joint suitable  
for use on a vehicle, and related methods of forming are described herein. In addition,  
methods of attaching components to glass by use of these adhesives are disclosed. The two-  
component urethane adhesives utilized in this invention have been found to provide  
surprisingly strong bonds between glass and other materials which meet or exceed OEM  
10 requirements, and be particularly well suited for use in vehicles.

FIG. 1

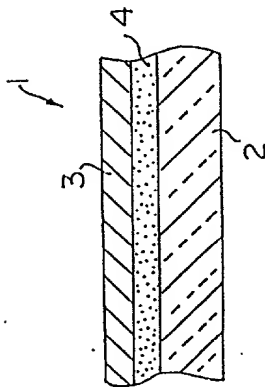


FIG. 2

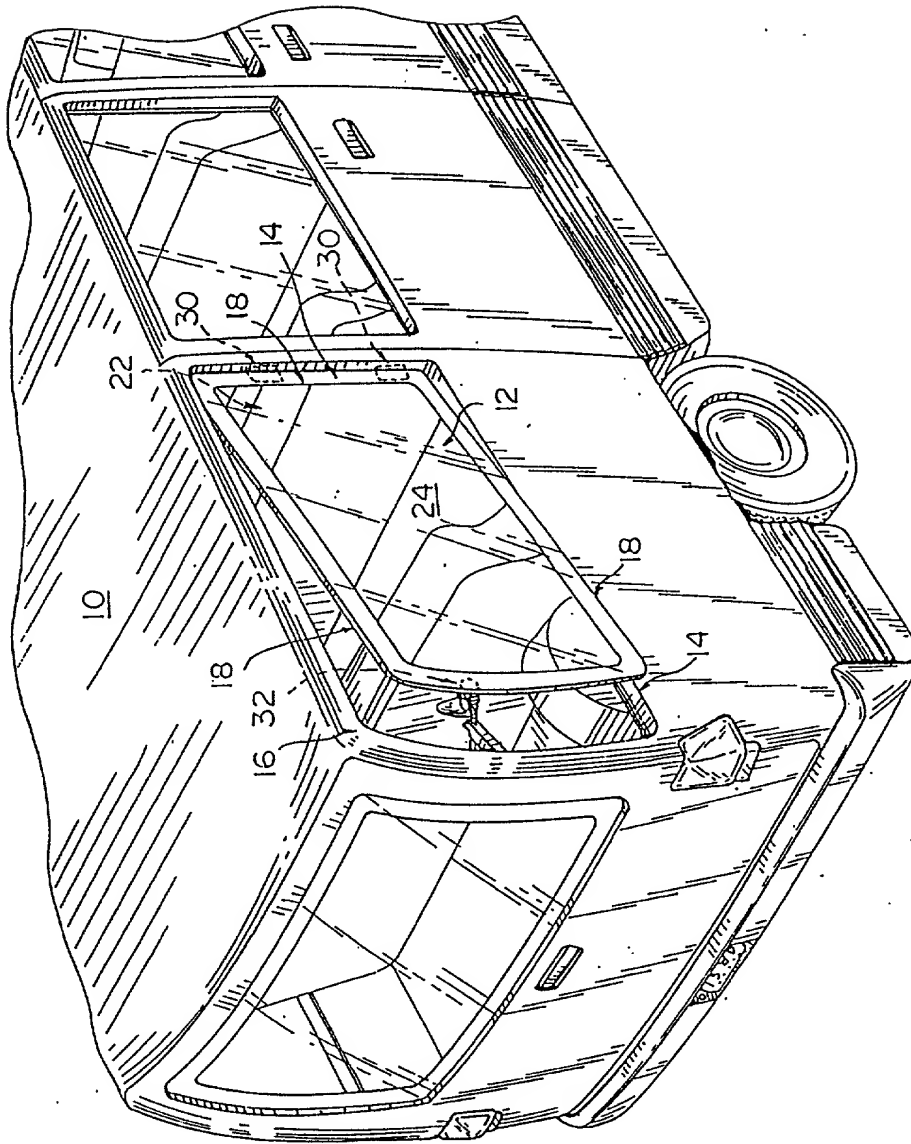


FIG. 3

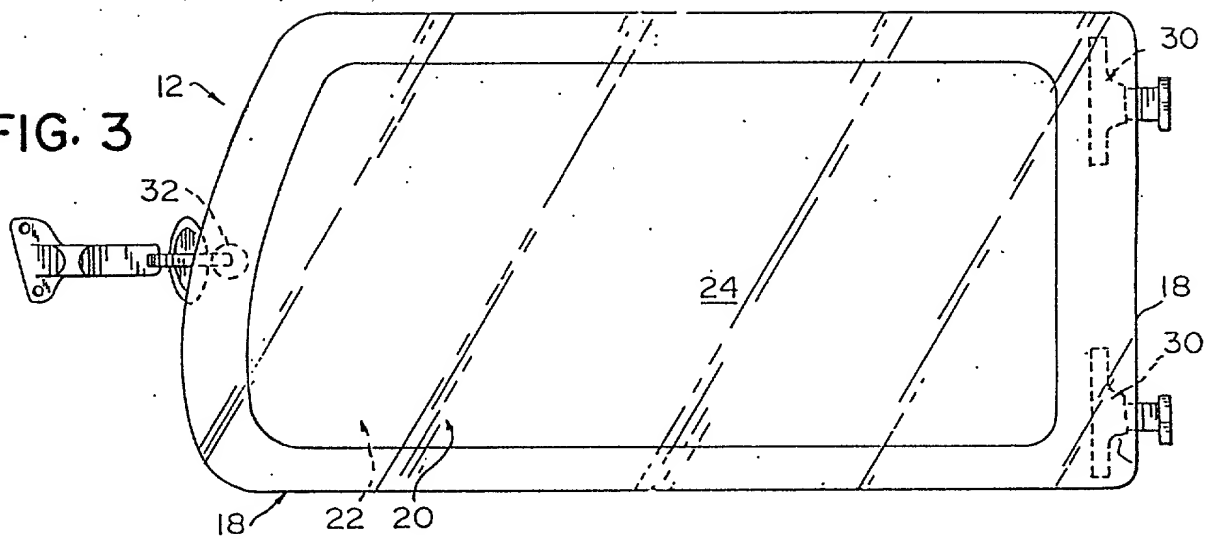


FIG. 4

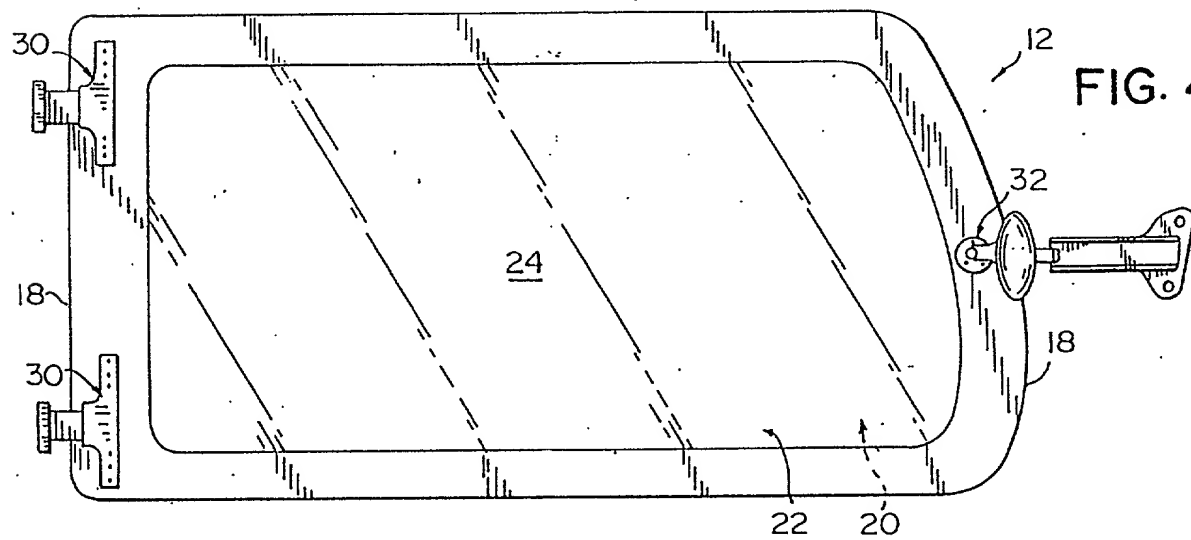


FIG. 5

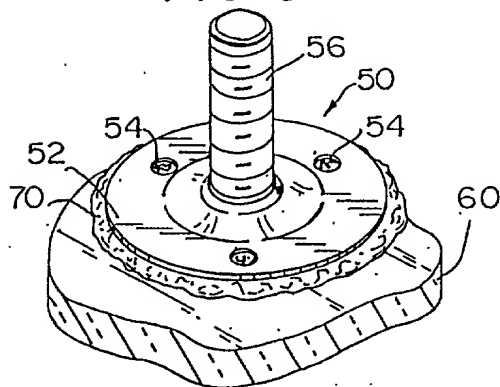


FIG. 6

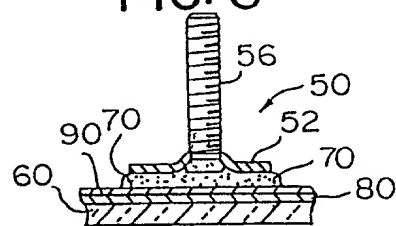


FIG. 7

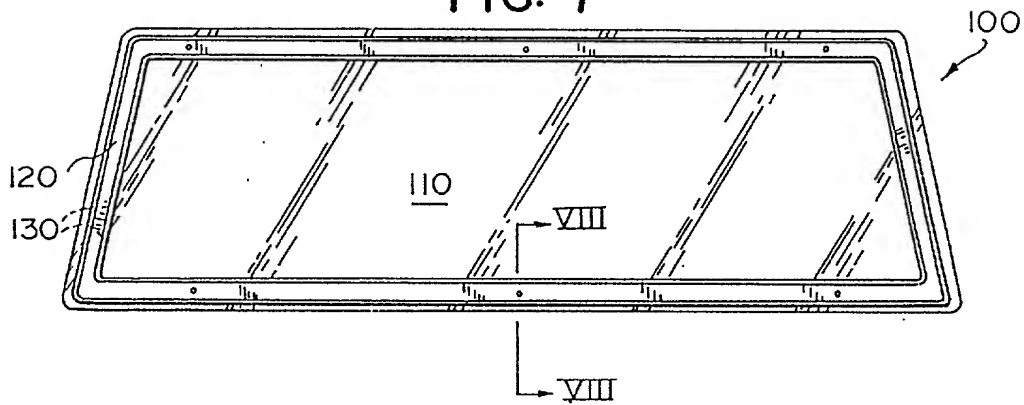


FIG. 8




FIG. 9

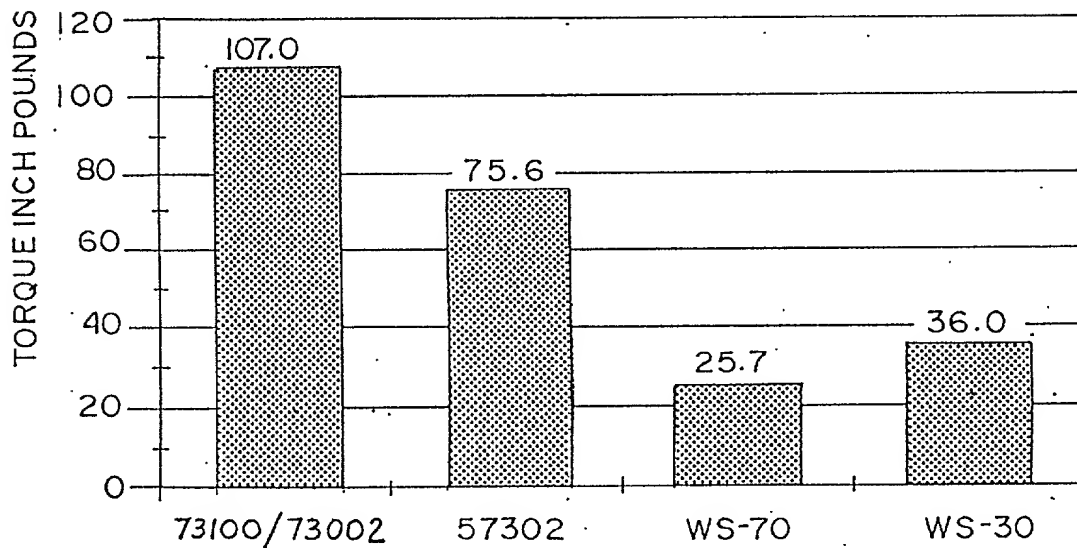


FIG. 10

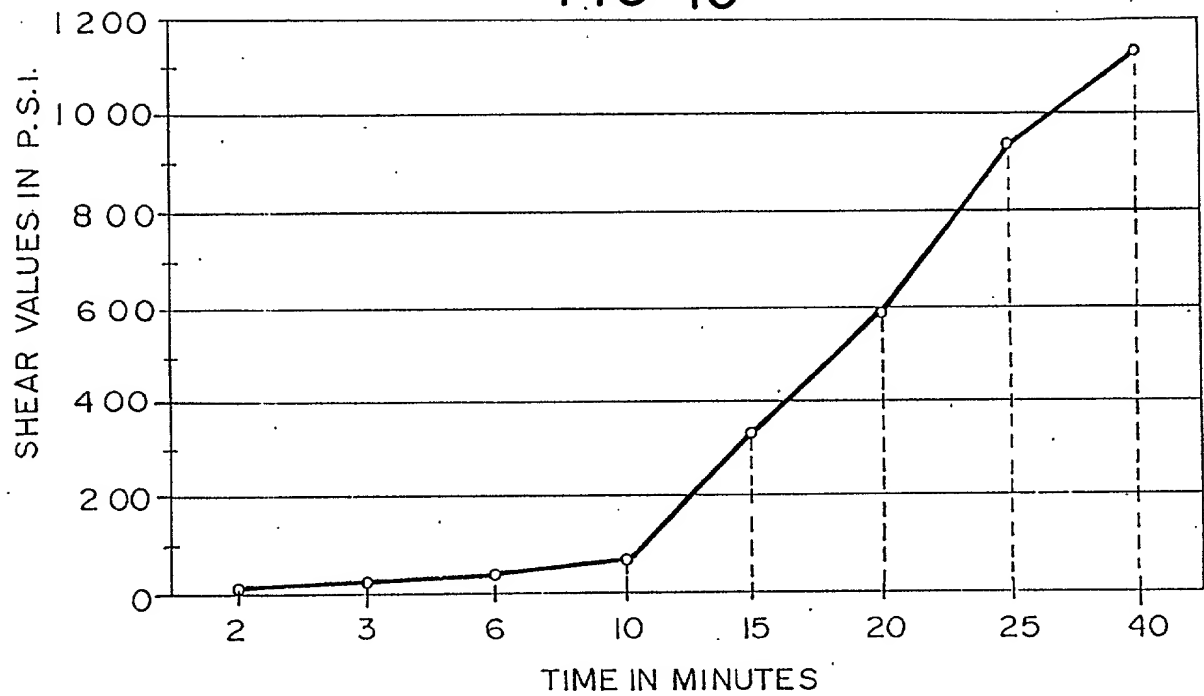
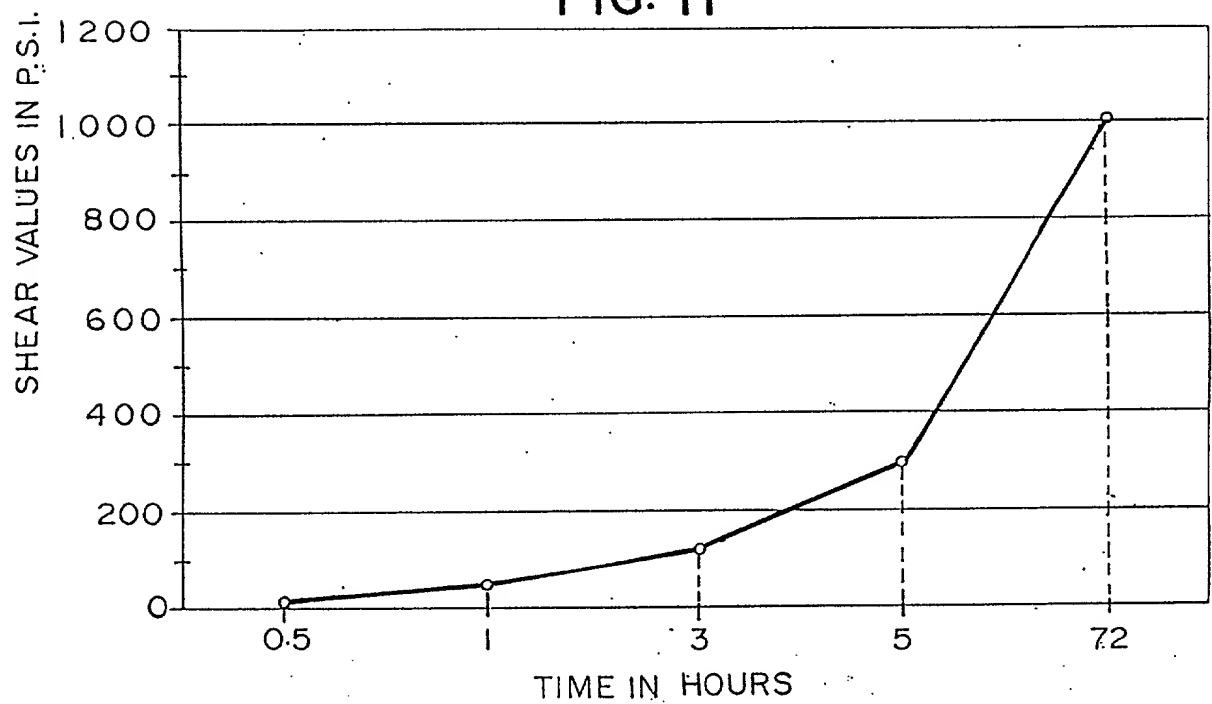


FIG. 11



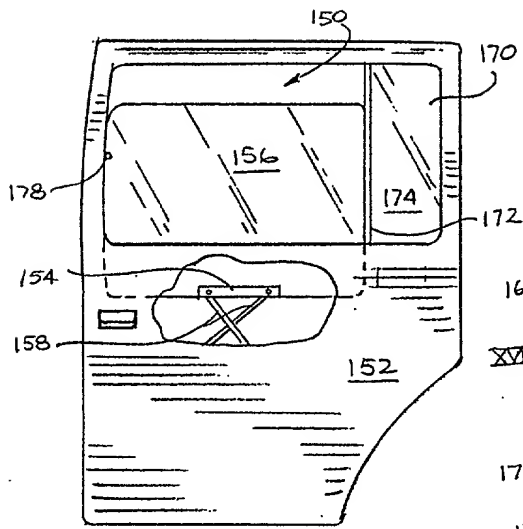


FIG. 12




FIG. 13




FIG. 14




FIG. 15




FIG. 16

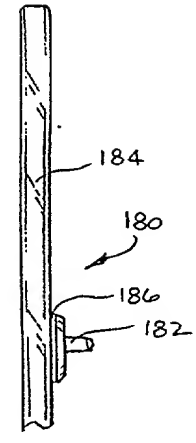


FIG. 17

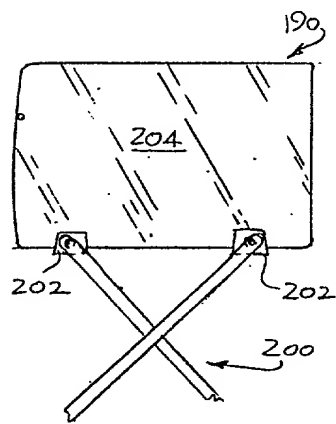


FIG. 18

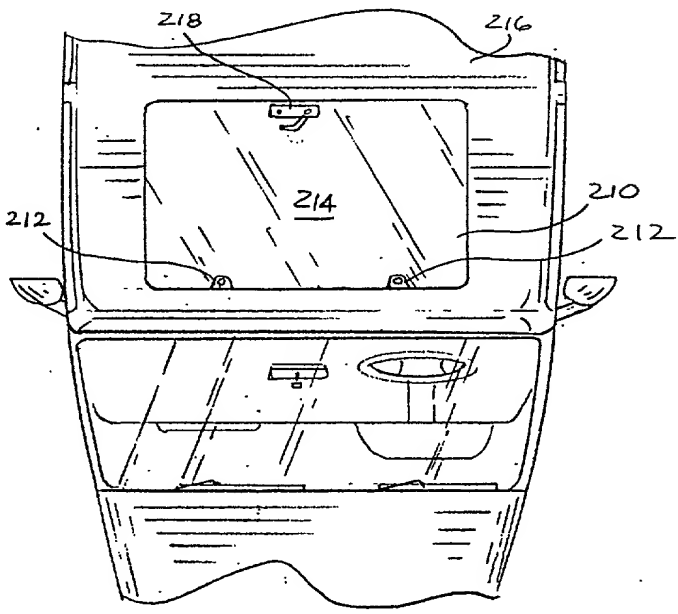


FIG. 19

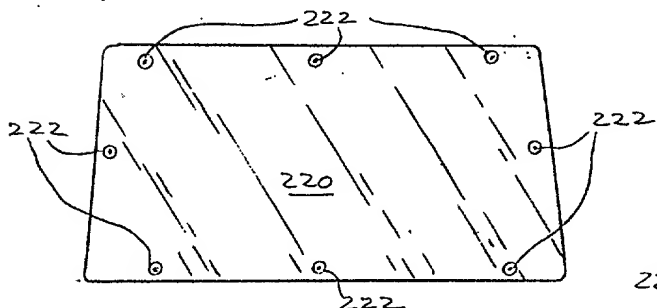


FIG. 20

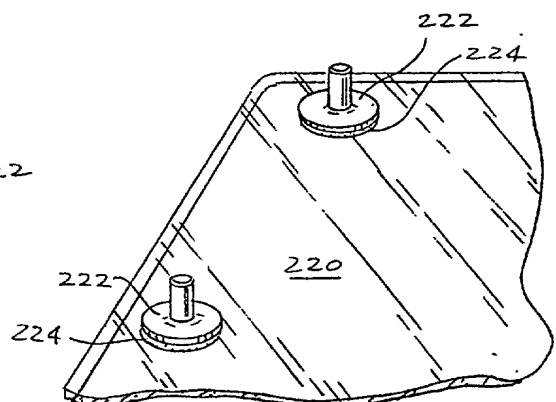


FIG. 21



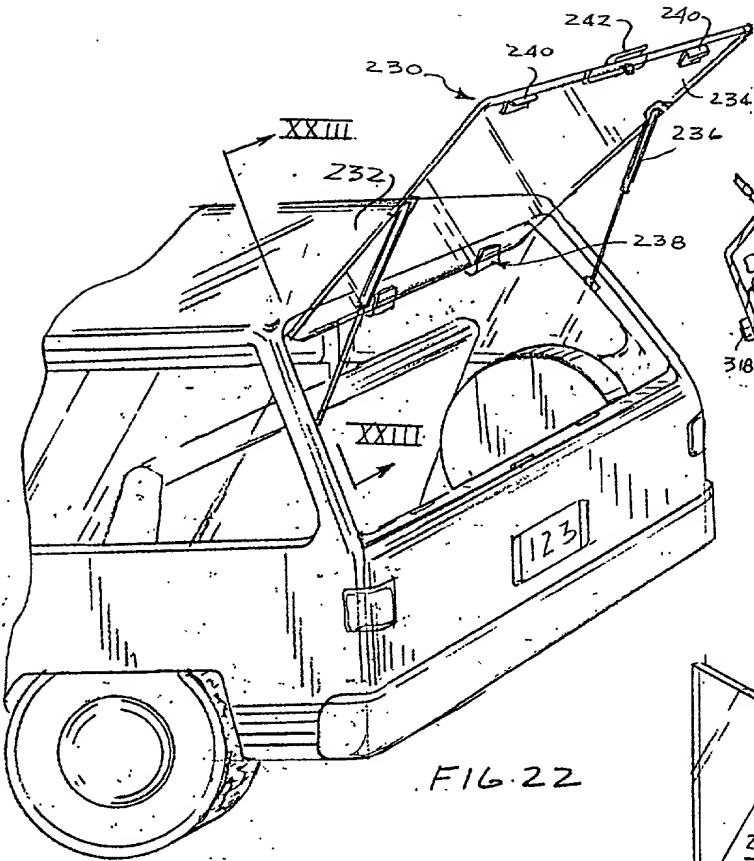


FIG. 22

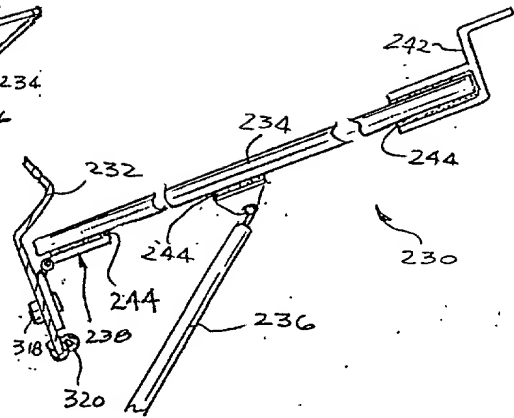


FIG. 23

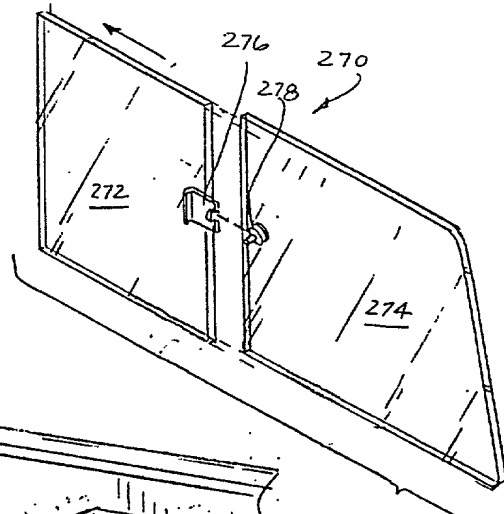


FIG. 25

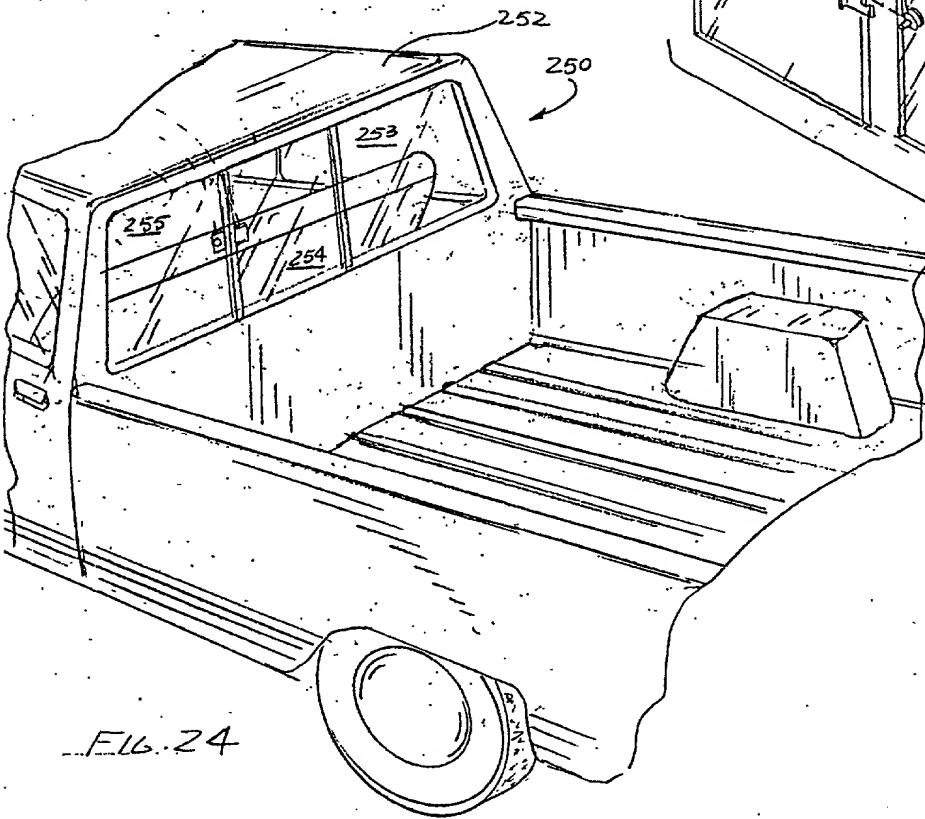


FIG. 24

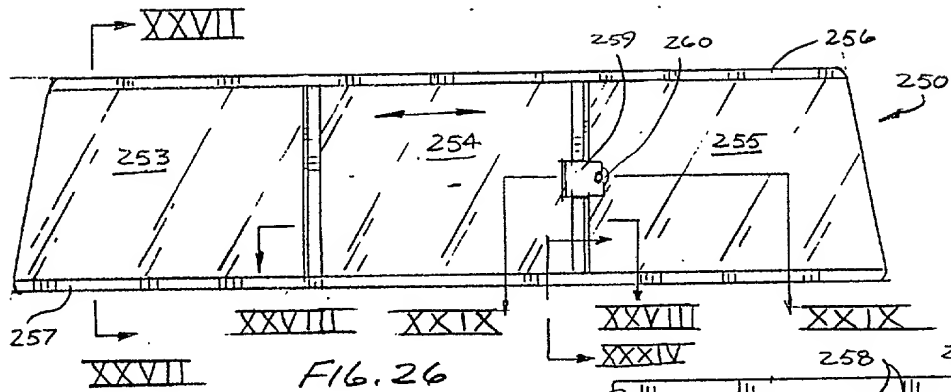


FIG. 26

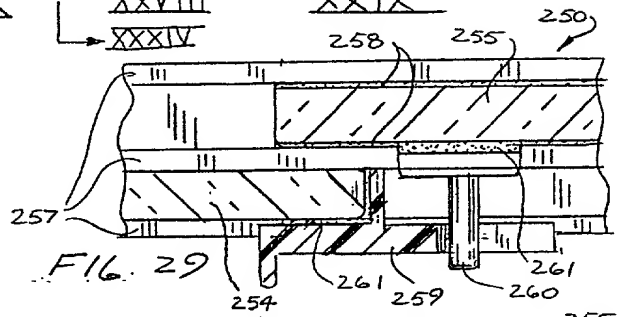


FIG. 29

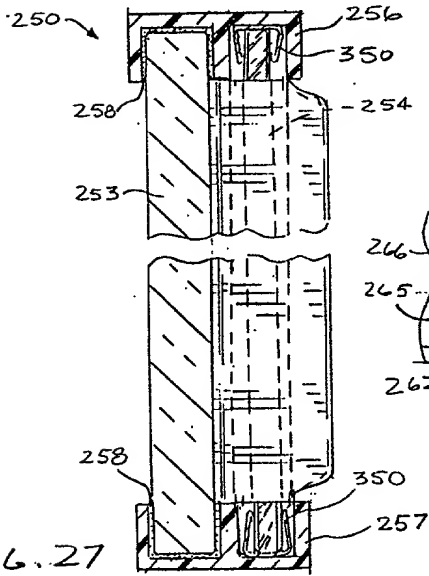


FIG. 27

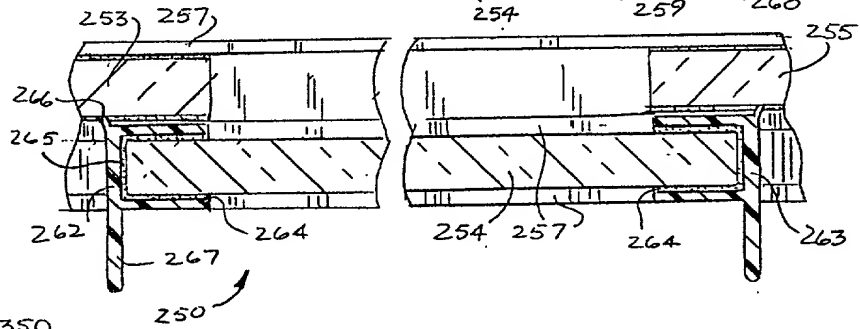


FIG. 28

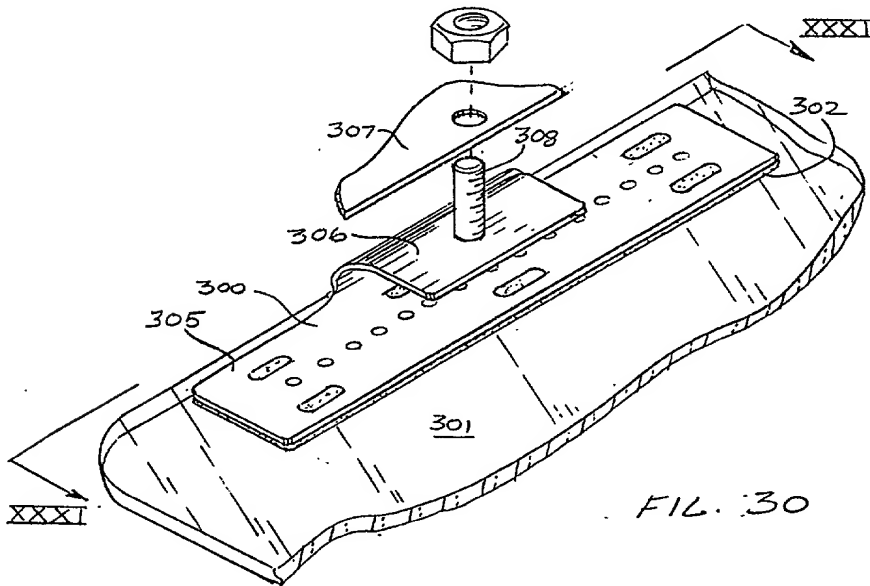


FIG. 30





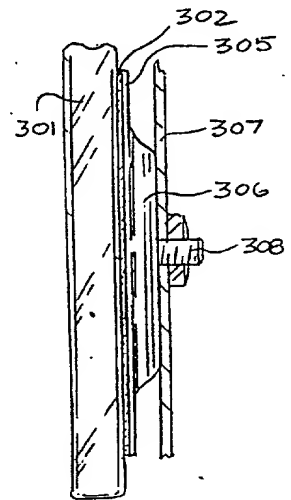


FIG. 31

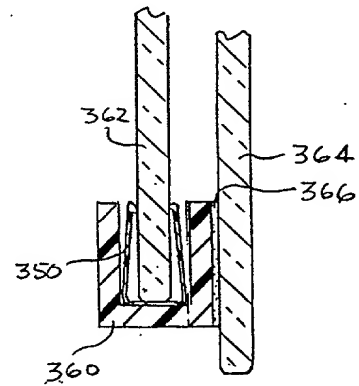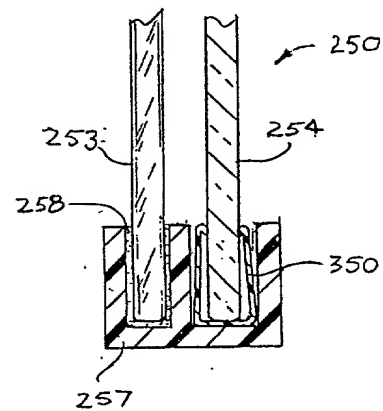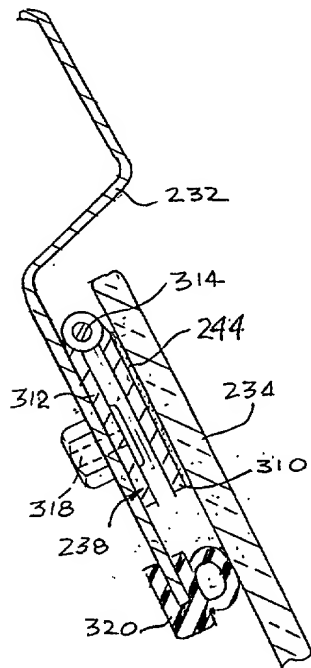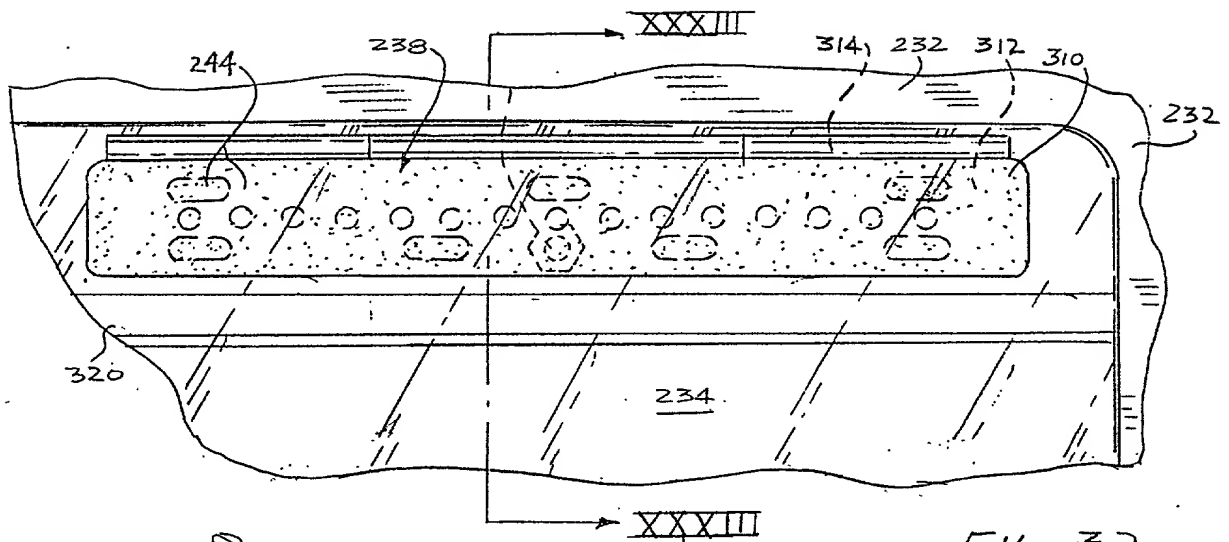

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **BONDED VEHICULAR GLASS ASSEMBLIES UTILIZING TWO-COMPONENT URETHANES, AND RELATED METHODS OF BONDING**

the specification of which (check one): ☒ is attached hereto;

\_\_\_\_\_ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_.

And I hereby appoint Price, Heneveld, Cooper, DeWitt and Litton, 695 Kenmoor Drive, S.E., P.O. Box 2567, Grand Rapids, Michigan 49501, and the individual attorneys and agents at such address, Lloyd A. Heneveld, No. 17 802; Richard C. Cooper, No. 19 164; William W. DeWitt, No. 22 300; Randall G. Litton, No. 24 013; James A. Mitchell, No. 25 120; Daniel Van Dyke, No. 25 046; Harold W. Reick, No. 25 438; Donald S. Gardner, No. 25 975; Robert J. Carrier, No. 24 219; Thomas M. McKinley, No. 26 952; Carl S. Clark, No. 28 288; Terence J. Linn, No. 30 283; Frederick S. Burkhart, No. 29 288; James E. Bartek, No. 34 770; Daniel L. Girdwood, No. 34 827; Randall S. Vaas, No. 34 479; Barry C. Kane, No. 32 036; Mark E. Bandy, No. 35 788, telephone number 616-949-9610, my attorney(s) or agent(s) with full power of substitution and revocation, to prosecute this application and to transact all business in and to receive all correspondence from the Patent and Trademark Office connected therewith.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

## CLAIM OF PRIORITY

I hereby claim foreign benefits under Title 35 United States Code (U.S.C.) Section 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Priority Claimed

N/A	(Number)	(Country)	(Day/month/year filed)	Yes	No

I hereby claim the benefit under 35 U.S.C. § 120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56, which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

N/A

(Application Serial No.)	(Filing Date)	(Status: issued, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Jeffrey A. Lewno

Full name of sole or first joint inventor

Inventor's Signature

Date

United States of America

Citizenship 7165 Rolling Hills Drive,  
Hudsonville, MI 49426

Residence (Street, City and State)  
Same as above

Post Office Address (Complete mailing address, i.e., P.O. Box, R.R., etc.)

Full name of third joint inventor

Inventor's Signature

Date

Citizenship

Residence (Street, City and State)

Post Office Address (Complete mailing address, i.e., P.O. Box, R.R., etc.)

Full name of second joint inventor

Inventor's Signature

Date

Citizenship

Residence (Street, City and State)

Post Office Address (Complete mailing address, i.e., P.O. Box, R.R., etc.)

Full name of fourth joint inventor

Inventor's Signature

Date

Citizenship

Residence (Street, City and State)

Post Office Address (Complete mailing address, i.e., P.O. Box, R.R., etc.)

09213706 121798